


SAFETY HEAVY HANGING GATE

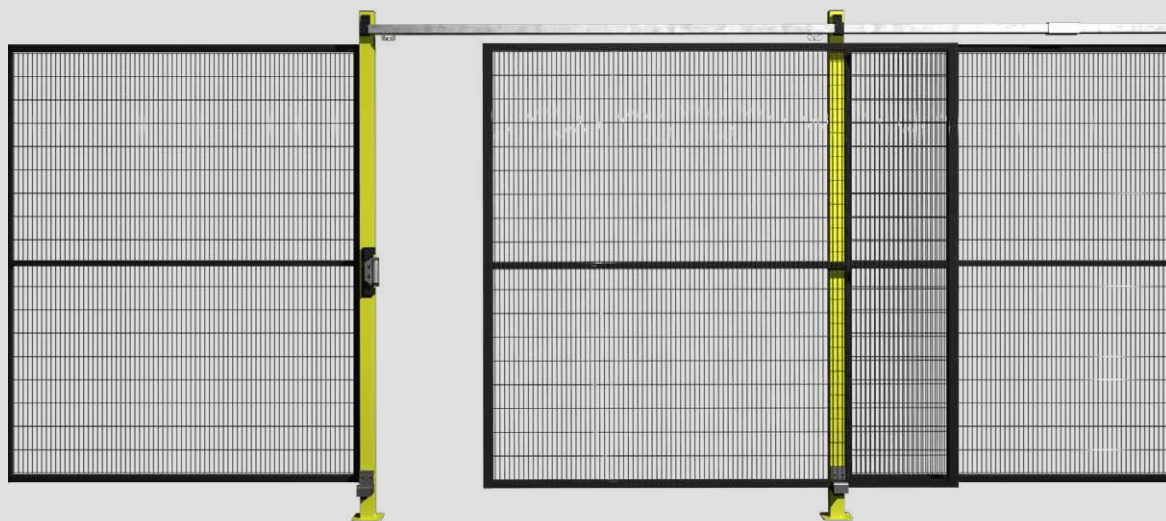

MRT's Safety Heavy range is designed to protect people and industrial machinery. It complies with the Machinery Directive 2006/42/CE standard.

CHARACTERISTICS

GATE


- Single or double leaf gate.
- Manual access with handle.
- Top track.

FILLING

- Mesh (flat panel): 100 x 20 mm.
- Wire diameter: 3.00 mm.
- Sections of the frame vertical tubes: 40x40x1.50 mm.
- Crossbar sections: 30x30x1.50 mm.

STANDARD DIMENSIONS


Type	Nominal width (m)	Height (m)	Total width (mm)	Useful passage (mm)	Top lane length (mm)	No. of sheets	Post size (mm)	Post height (mm)
Single leaf gate	1.00	2.00	2,230	940	2,145	2	60 x 60 x 2.00	2,150
		2.40						2,550
	1.50	2.00	3,230	1,440	3,145			2,150
		2.40						2,550
	2.00	2.00	4,230	1,940	4,145			2,150
		2.40						2,550
Double leaf gate	2.00	2.00	4,335	1,940	4,250	4		2,150
		2.40						2,550
	3.00	2.00	6,335	2,940	6,250			2,150
		2.40						2,550
	4.00	2.00	8,335	3,940	8,250			2,150
		2.40						2,550

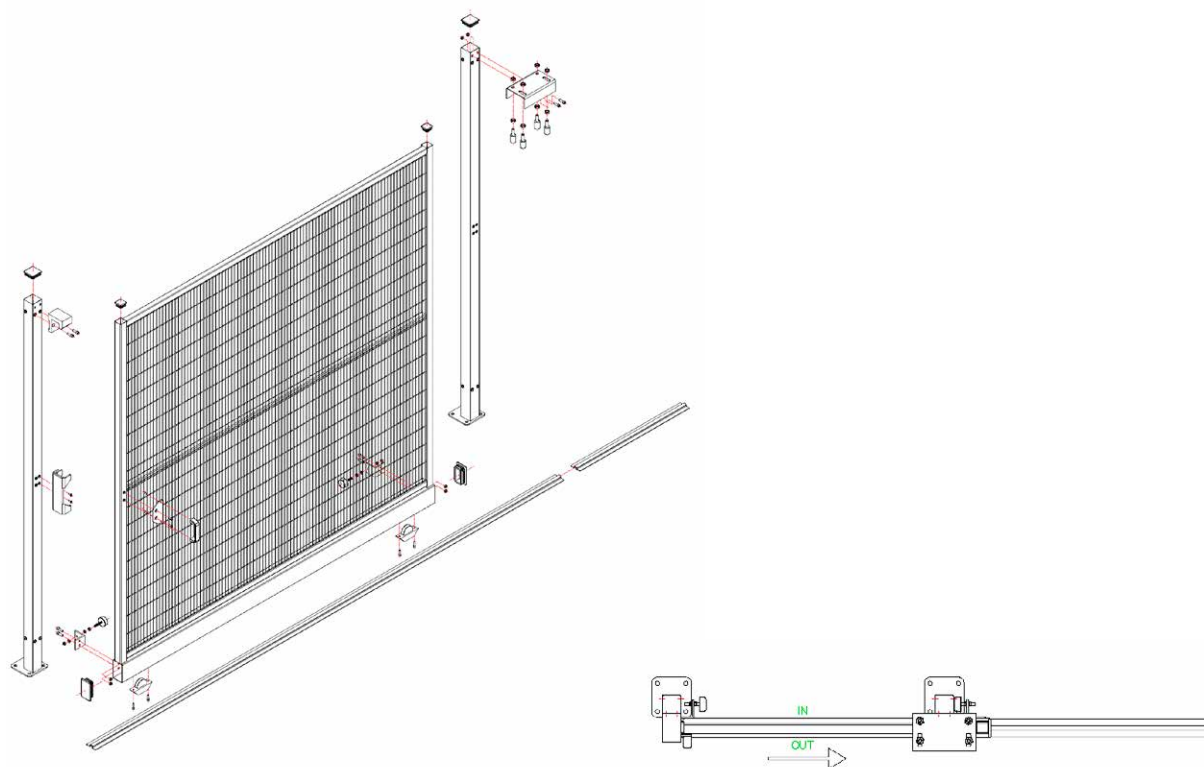

ASSOCIATED PRODUCTS

SAFETY HEAVY SYSTEM

- It is composed of framed panels, posts and captive screws.

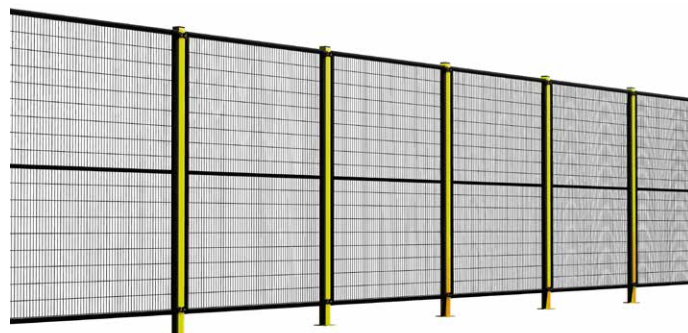

FINISHING FEATURES

- Standard colours: black panel and yellow post.
- Polyester thickness: 80 microns minimum.
- Steel galvanized wire according to EN 10244-2 standard.
- Steel galvanized sheet according to EN 10346 standard.

