


SAFETY HEAVY SLIDING GATE

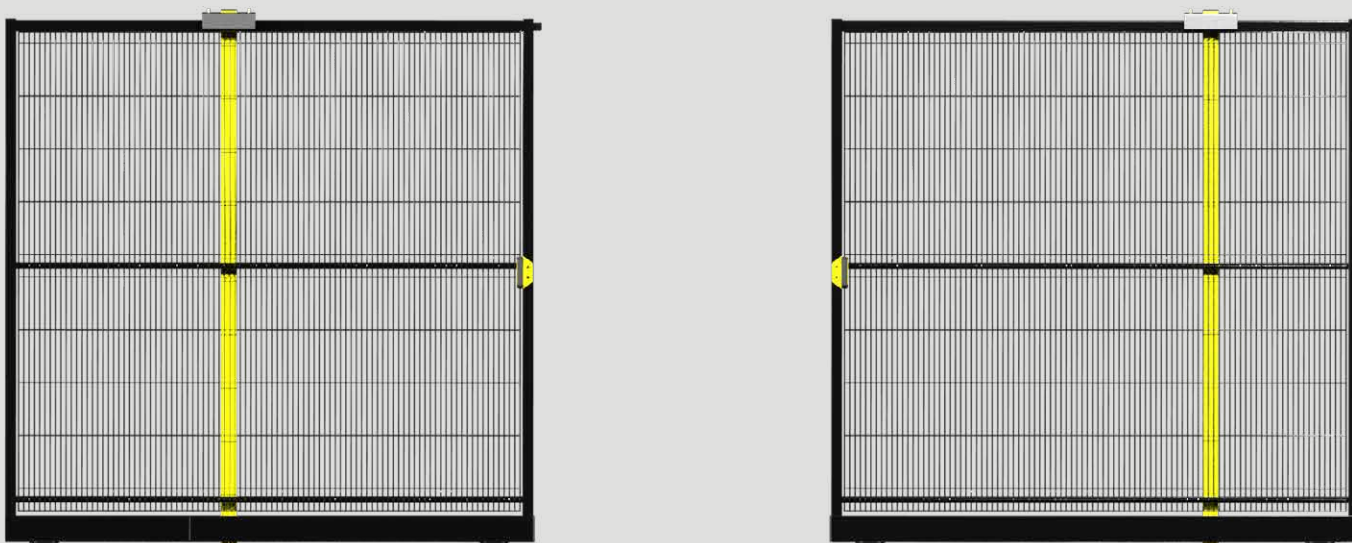

MRT's Safety Heavy range is designed to protect people and industrial machinery. It complies with the Machinery Directive 2006/42/CE standard.

CHARACTERISTICS


GATE

- Single or double leaf gate.
- Manual access with handle.
- Guide rail.

FILLING

- Mesh (flat panel): 100 x 20 mm.
- Wire diameter: 3.00 mm.
- Sections of the frame vertical tubes: 40x40x1.50 mm.
- Crossbar sections: 30x30x1.50 mm.

GATE PLAN

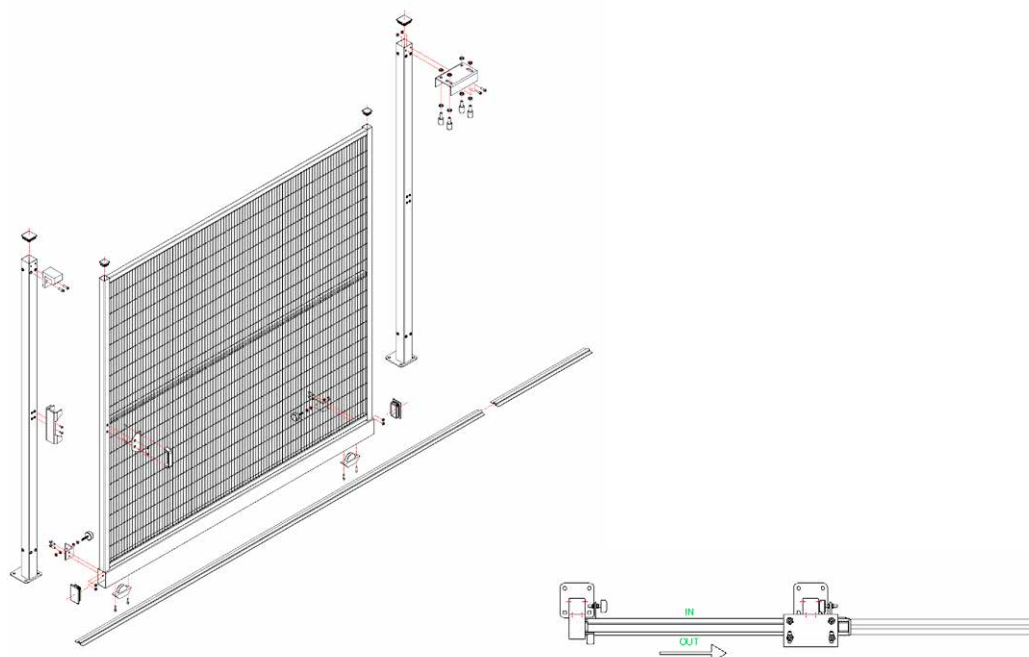


STANDARD DIMENSIONS

Type	Nominal width (m)	Height (m)	Total width (mm)]	Useful passage (mm)	Bottom lane length (mm)	No. of sheets	Post size (mm)	Post height (mm)
Single leaf gate	1.00	1.00	1,800	700	1,700	2	60 x 60 x 2.00	1,040
		1.50						1,540
		2.00						2,040
		2.40						2,440
	1.50	1.00	2,800	1,200	2,700			1,040
		1.50						1,540
		2.00						2,040
		2.40						2,440
	2.00	1.00	3,800	1,700	3,700			1,040
		1.50						1,540
		2.00						2,040
		2.40						2,440
Double leaf gate	2.00	1.00	3,474	1,460	3,400	4	1,040	
		1.50					1,540	
		2.00					2,040	
		2.40					2,440	
	3.00	1.00	5,474	2,460	5,400		1,040	
		1.50					1,540	
		2.00					2,040	
		2.40					2,440	
	4.00	1.00	7,474	3,460	7,400		1,040	
		1.50					1,540	
		2.00					2,040	
		2.40					2,440	

ASSOCIATED PRODUCTS

SAFETY LIGHT SYSTEM

- It is composed of mesh panels with folds, posts and staples with captive screws.

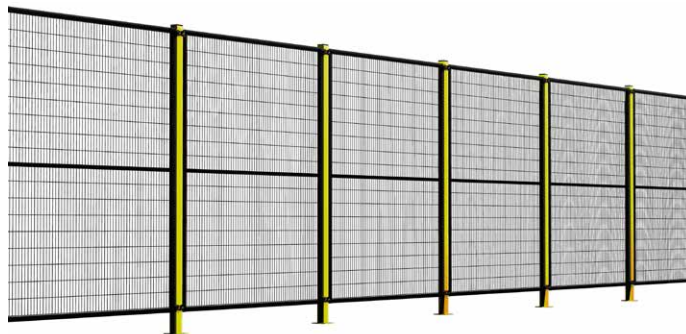

FINISHING FEATURES

- Standard colours: black panel and yellow post.
- Polyester thickness: 80 microns minimum.
- Steel galvanized wire according to EN 10244-2 standard.
- Steel galvanized sheet according to EN 10346 standard.

