


SAFETY HEAVY TELESCOPIC GATE

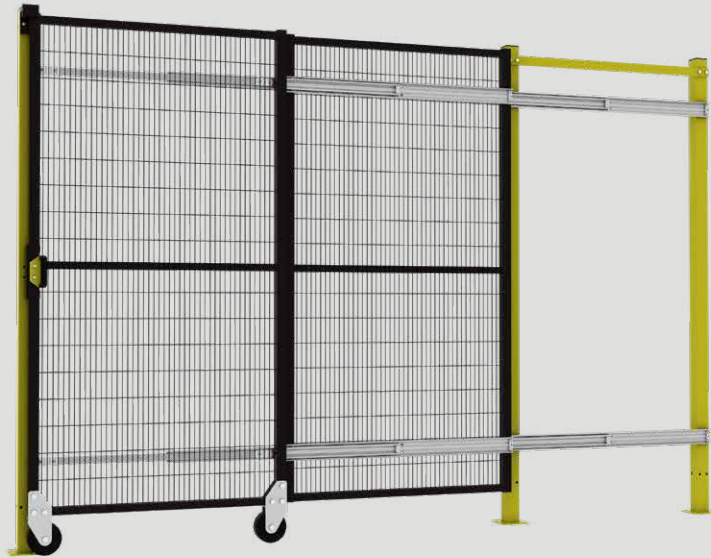

MRT's Safety Heavy range is designed to protect people and industrial machinery. It complies with the Machinery Directive 2006/42/CE standard.

CHARACTERISTICS

GATE

- Single or double leaf gate.
- Manual access with handle.
- Without rail, It is suitable for transporting large objects through the gate.
- With telescopic track and $\varnothing 125$ mm rubber wheels.



FILLING

- Mesh (flat panel): 100 x 20 mm.
- Wire diameter: 3.00 mm.
- Sections of the frame vertical tubes: 40x40x1.50 mm.
- Crossbar sections: 30x30x1.50 mm.



FINISHING FEATURES

- Standard colours: black panel and yellow post.
- Polyester thickness: 80 microns minimum.
- Steel galvanized wire according to EN 10244-2 standard.
- Steel galvanized sheet according to EN 10346 standard.



STANDARD DIMENSIONS


Heights for all telescopic gates.

Nominal height (m)	Total height (mm)	Floor-to-leaf height (mm)	Post size (mm)	Post height (mm)
1.00	1,015	145	60 x 60 x 2.00	1,040
1.50	1,515			1,540
2.00	2,015			2,040
2.40	2,415			2,440

Gates can be side opening (single gate) or centre opening (double gate). In addition, the leaves can be with one panel or two overlapping panels.


Single gate

Installation total width (mm)	Useful passage (mm)	Panel width (mm)
1,635	770	800
2,035	970	1,000
2,435	1,170	1,200
3,035	1,470	1,500




Two panels single gate

Installation total width (mm)	Useful passage (mm)	Panel width (mm)
2,685	1,720	900
3,035	1,970	1,500




Double gate

Installation total width (mm)	Useful passage (mm)	Panel width (mm)
3,210	1,600	800
4,010	2,000	1,000
4,810	2,400	1,200
6,010	3,000	1,500

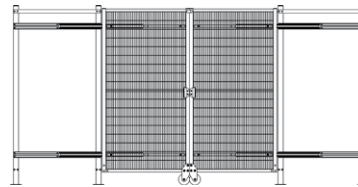

Two panels double gate

Installation total width (mm)	Useful passage (mm)	Panel width (mm)
5,310	3,500	900
6,010	4,000	1,000

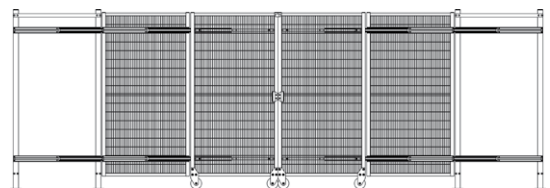

ASSOCIATED PRODUCTS

SAFETY HEAVY SYSTEM

- It is composed of framed panels, posts and captive screws.

