


SAFETY LIGHT HANGING GATE

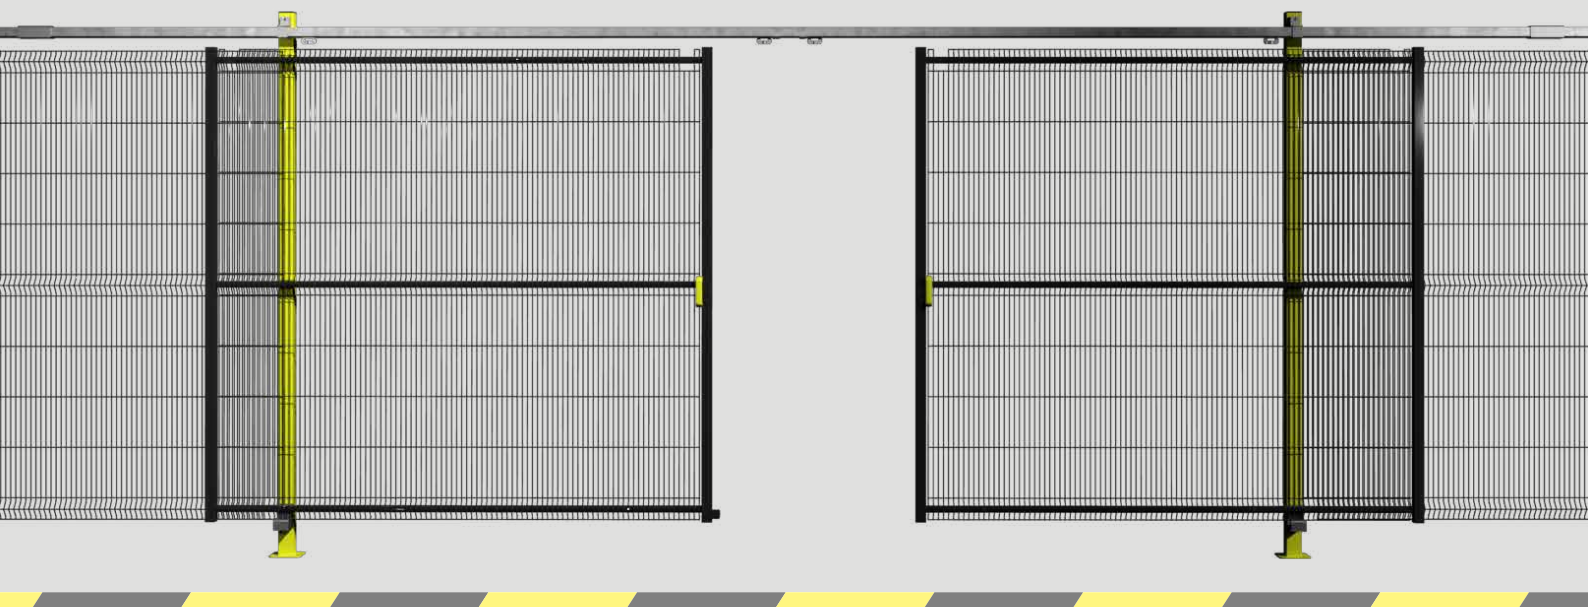

MRT's Safety Light range de MRT is designed to protect people and industrial machinery. It complies with the Machinery Directive 2006/42/CE standard.

CHARACTERISTICS

GATE


- Single or double leaf gate.
- Manual access with handle.
- Top track.

FILLING

- Panel with bends, Mesh 200 x 20 mm.
- Wire diameter: 4.00 mm.
- Section of vertical tubes: 40x40x1.50 mm.
- Crossbar sections: 25x25x1.50 mm.

STANDARD DIMENSIONS


Type	Nominal width (m)	Height (m)	Total width (mm)	Useful passage (mm)	Top guide length (mm)	No. of wheels	Post size (mm)	Post height (mm)
Single leaf gate	1.00	2.00	2,230	940	2,145	2	60 x 60 x 2.00	2,150
	1.50		3,230	1,440	3,145			
	2.00		4,230	1,940	4,145			
Double leaf gate	2.00		4,335	1,940	4,250	4		
	3.00		6,335	2,940	6,250			
	4.00		8,335	3,940	8,250			

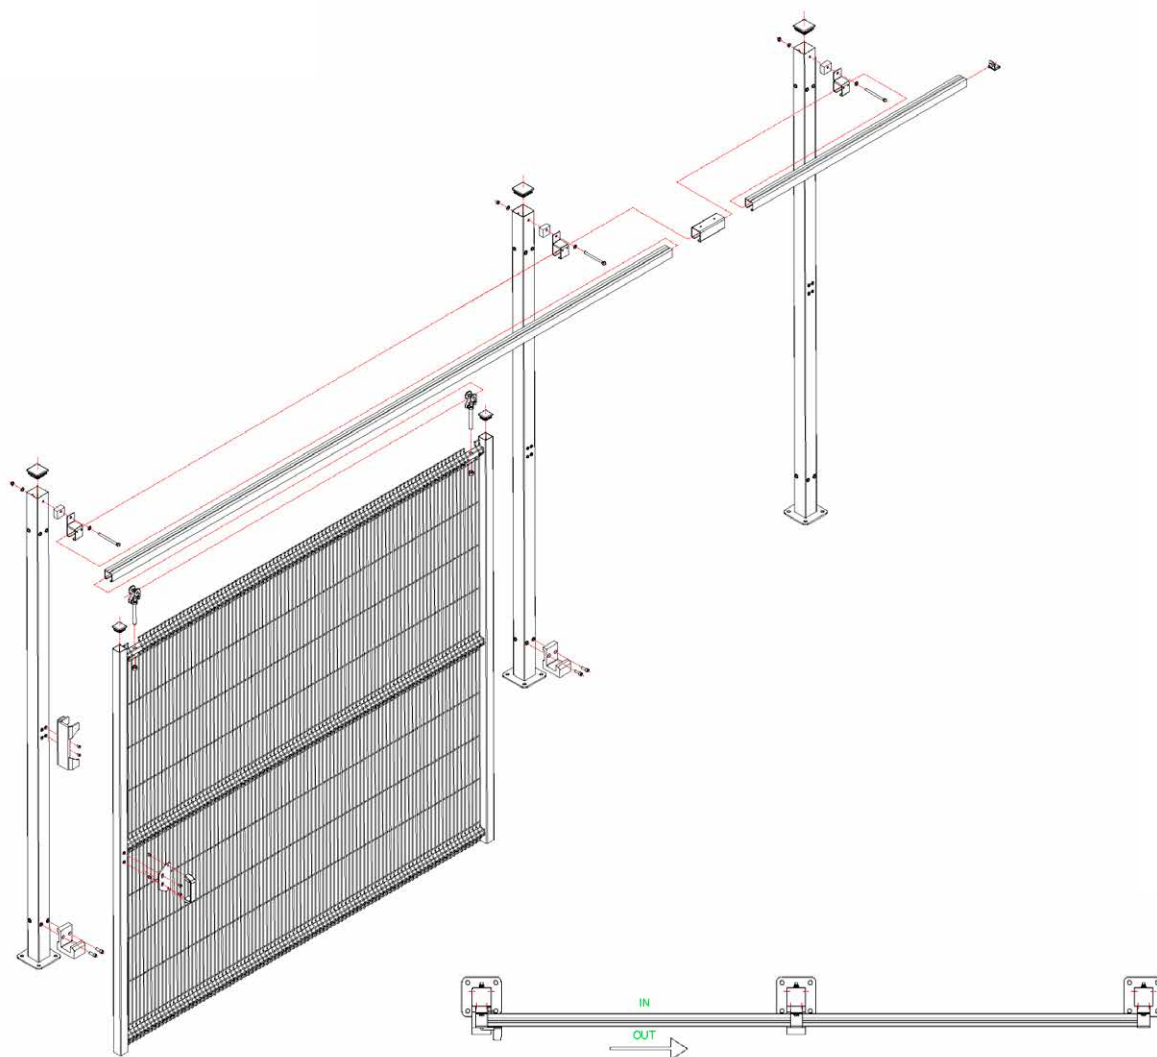

ASSOCIATED PRODUCTS

SAFETY LIGHT SYSTEM

- It is composed of mesh panels with folds, posts and staples with captive screws.

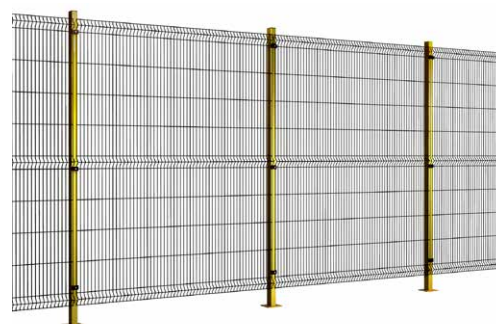

FINISHING FEATURES

- Standard colours: black panel and yellow post.
- Polyester thickness: 80 microns minimum.
- Steel galvanized wire according to EN 10244-2 standard.
- Steel galvanized sheet according to EN 10346 standard.

