


# SAFETY LIGHT SLIDING GATE

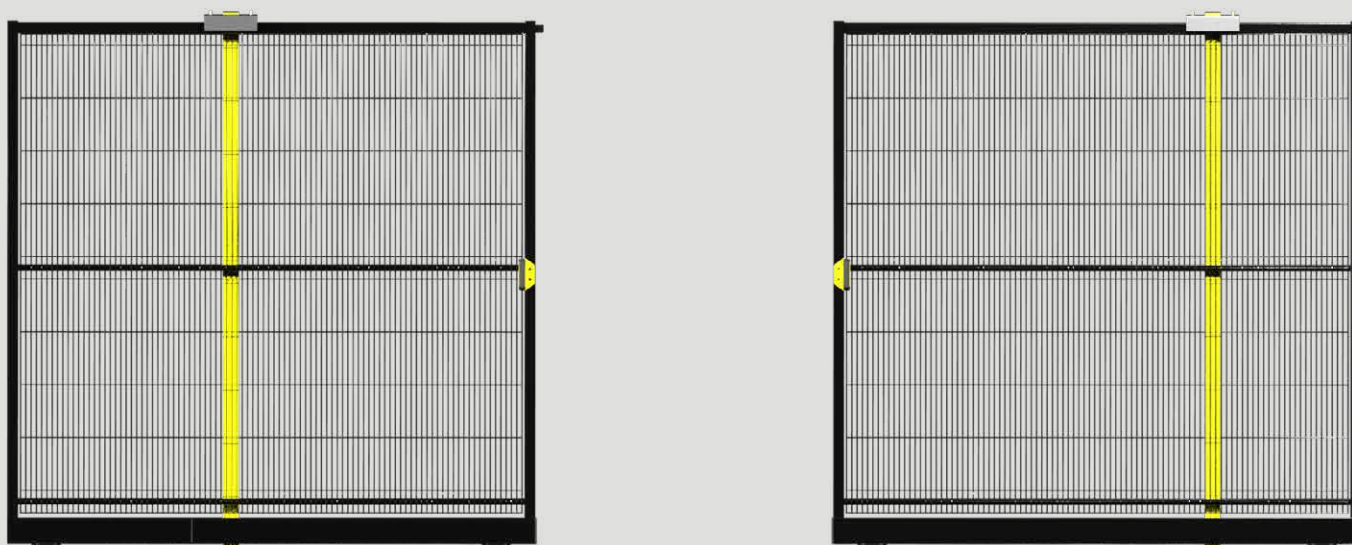

MRT's Safety Light range de MRT is designed to protect people and industrial machinery. It complies with the Machinery Directive 2006/42/CE standard.

## CHARACTERISTICS

### GATE


- Single or double leaf gate.
- Manual access with handle.
- Guide rail.

### FILLING

- Panel with bends, Mesh 200 x 20 mm.
- Wire diameter: 4.00 mm.
- Section of vertical tubes: 40x40x1.50 mm.
- Crossbar sections: 25x25x1.50 mm.

## STANDARD DIMENSIONS


Type	Nominal width (m)	Height nominal (m)	Total width (mm)	Useful passage (mm)	Bottom lane length (mm)	No. of wheels	Post size (mm)	Post height (mm)
Single leaf gate	1.00	1.50	1,800	700	1,700	2	60 x 60 x 2.00	1,540
		2.00						2,040
	1.50	1.50	2,800	1,200	2,700			1,540
		2.00						2,040
	2.00	1.50	3,800	1,700	3,700			1,540
		2.00						2,040
Double leaf gate	2.00	1.50	3,474	1,460	3,400	4		1,540
		2.00						2,040
	3.00	1.50	5,474	2,460	5,400		1,540	
		2.00					2,040	
	4.00	1.50	7,474	3,460	7,400		1,540	
		2.00					2,040	

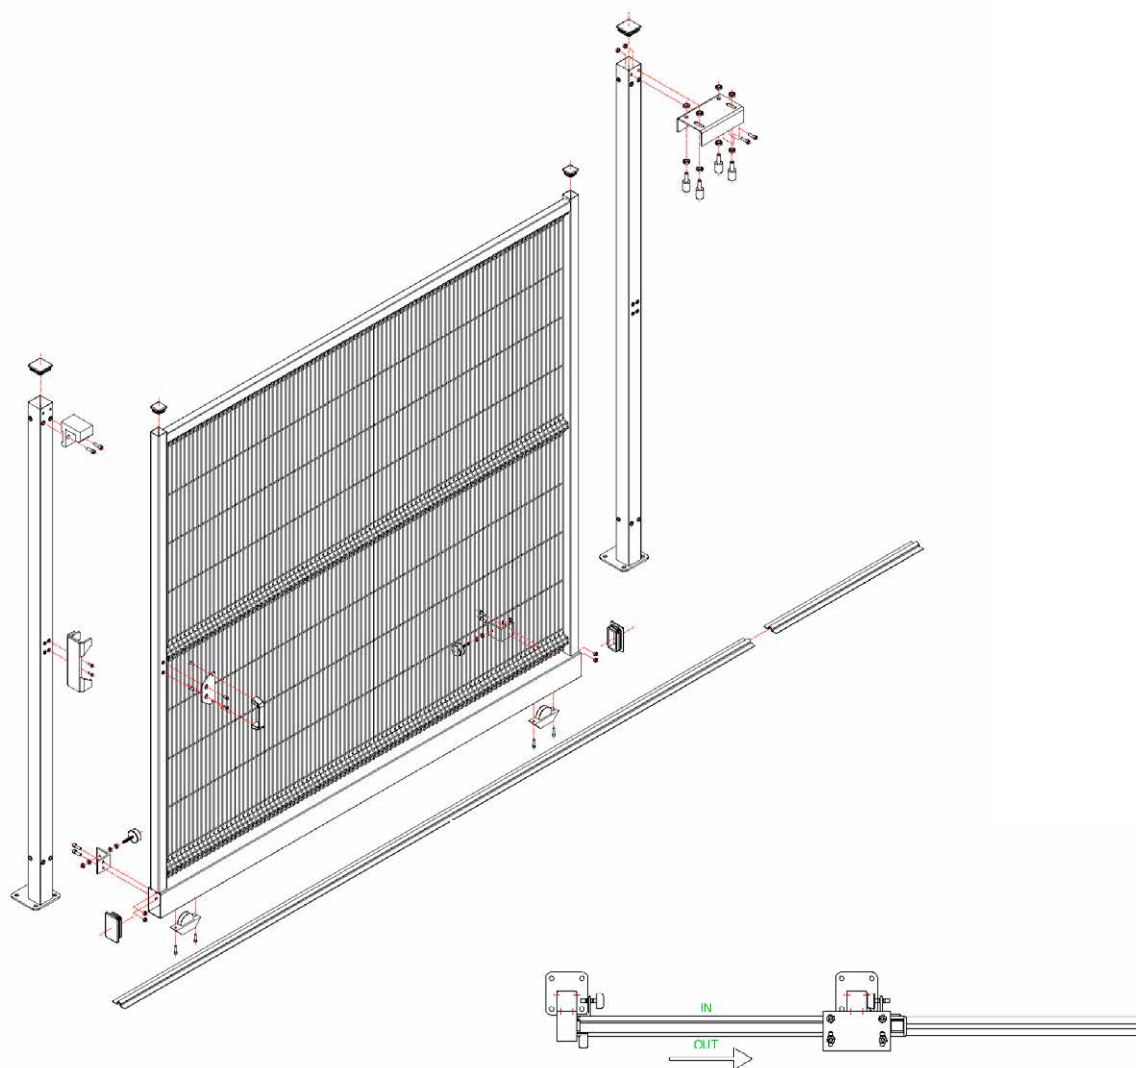

## ASSOCIATED PRODUCTS

### SAFETY LIGHT SYSTEM

- It is composed of mesh panels with folds, posts and staples with captive screws.

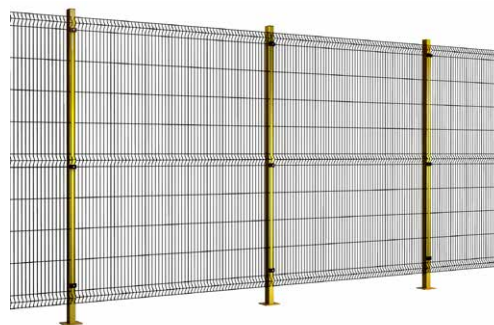

## FINISHING FEATURES

- Standard colours: black panel and yellow post.
- Polyester thickness: 80 microns minimum.
- Steel galvanized wire according to EN 10244-2 standard.
- Steel galvanized sheet according to EN 10346 standard.

