


# SAFETY LIGHT SWING GATE

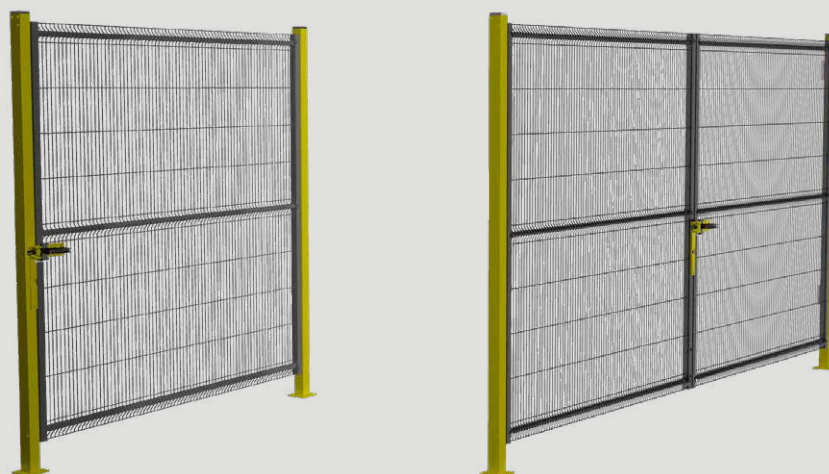

MRT's Safety Light range de MRT is designed to protect people and industrial machinery. It complies with the Machinery Directive 2006/42/CE standard.

## CHARACTERISTICS

### GATE



- Single or double leaf gate.
- Manual access.
- Zinc and powder coated hinge.
- 180° opening.

### FILLING

- Panel with bends, Mesh 200 x 20 mm.
- Wire diameter: 4.00 mm.
- Section of vertical tubes: 40x40x1.50 mm.
- Crossbar sections: 25x25x1.50 mm.

## STANDARD DIMENSIONS


Type	Nominal width (m)	Height (m)	Total width (mm)	Useful passage (mm)	Frame (mm)	Post size (mm)	Post height (mm)	
Single leaf gate	1.00	1.50	1,221	1,015	Vertical: 40 x 40 x 1.50  Horizontal: 25 x 25 x 1.50	60 x 60 x 1.50	1,530	
		2.00	1,221				2,030	
	1.50	1.50	1,721	1,515		60 x 60 x 1.50	1,530	
		2.00	1,761			80 x 80 x 2.00	2,030	
	2.00	1.50	2,261	2,015		80 x 80 x 2.00	1,530	
		2.00	2,301			100 x 100 x 2.00	2,030	
Double leaf gate	2.00	1.50	2,242	2,015		Horizontal: 25 x 25 x 1.50	60 x 60 x 1.50	1,530
		2.00	2,242					2,030
	3.00	1.50	3,242	3,015			60 x 60 x 1.50	1,530
		2.00	3,282				80 x 80 x 2.00	2,030
	4.00	1.50	4,282	4,015			80 x 80 x 2.00	1,530
		2.00	4,322				100 x 100 x 2.00	2,030

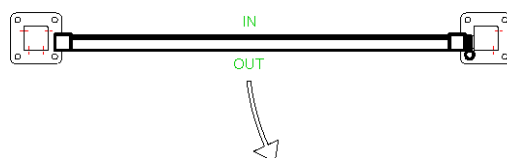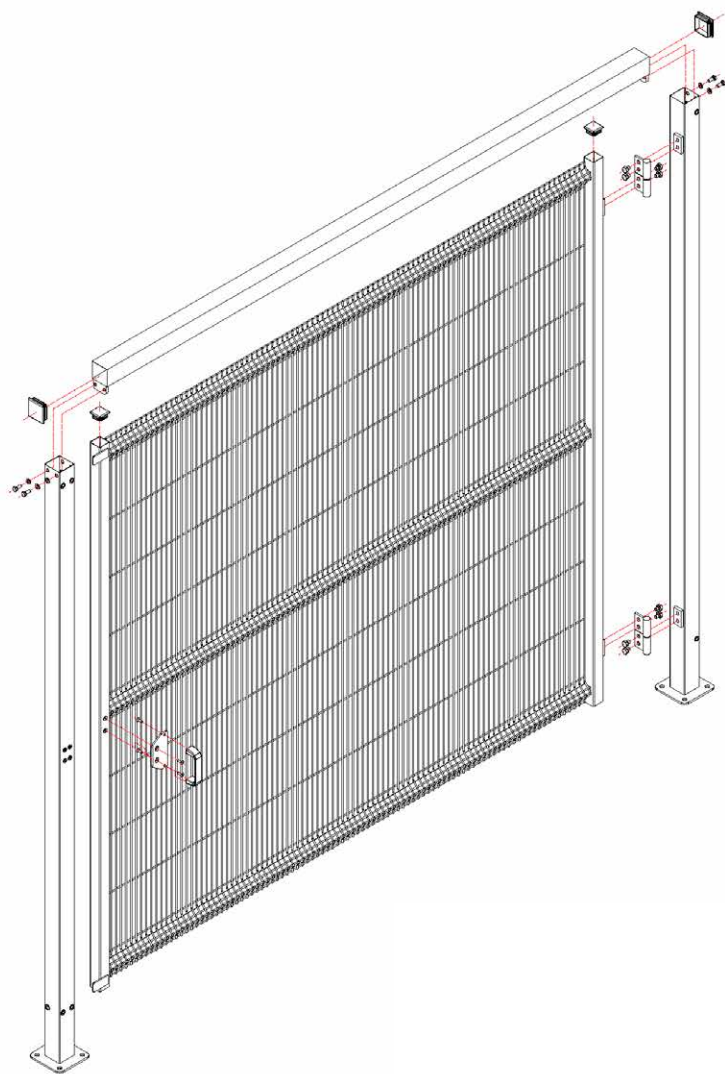

## ASSOCIATED PRODUCTS

### SAFETY LIGHT SYSTEM

- It is composed of mesh panels with folds, posts and staples with captive screws.

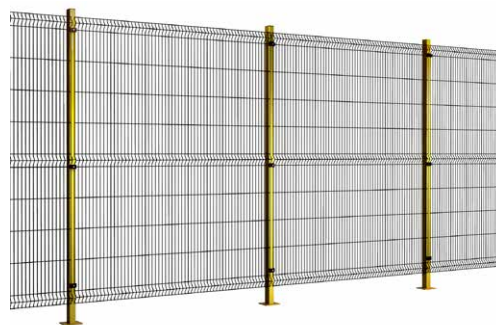

## FINISHING FEATURES

- Standard colours: black panel and yellow post.
- Polyester thickness: 80 microns minimum.
- Steel galvanized wire according to EN 10244-2 standard.
- Steel galvanized sheet according to EN 10346 standard.

