


# SAFETY LIGHT TELESCOPIC GATE

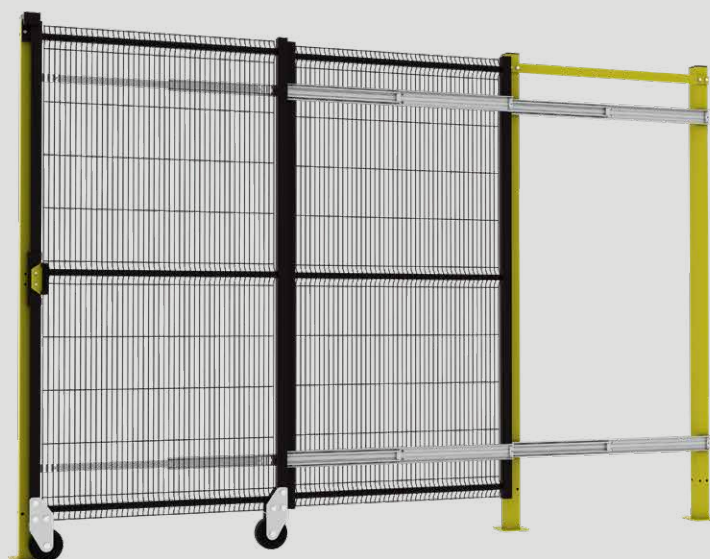

MRT's Safety Light range de MRT is designed to protect people and industrial machinery. It complies with the Machinery Directive 2006/42/CE standard.

## CHARACTERISTICS

### GATE

- Single or double leaf gate.
- Manual access with handle.
- Without rail, It is suitable for transporting large objects through the gate.
- With telescopic track and Ø125 mm rubber wheels.

### FILLING

- Panel with bends, Mesh 100/200 x 20 mm.
- Wire diameter: 4.00 mm.
- Section of vertical tubes: 40x40x1.50 mm.
- Crossbar sections: 25x25x1.50 mm.



## FINISHING FEATURES

- Standard colours: black panel and yellow post.
- Polyester thickness: 80 microns minimum.
- Steel galvanized wire according to EN 10244-2 standard.
- Steel galvanized sheet according to EN 10346 standard.

Yellow  
RAL 1021



Black  
RAL 9005



200+ RAL  
colours






## STANDARD DIMENSIONS

Nominal height (m)	Total height (mm)	Floor-to-leaf height (mm)	Post size (mm)	Post height (mm)
1.50	1,515	145	60 x 60 x 2.00	1,540
2.00	2,015			2,040

Gates can be side opening (single gate) or centre opening (double gate). In addition, the leaves can be with one panel or two overlapping panels.


### Single gate

Installation total width (mm)	Useful passage (mm)	Panel width (mm)
1,635	770	800
2,035	970	1,000
2,435	1,170	1,200
3,035	1,470	1,500




### Single gate with two panels for leaf

Installation total width (mm)	Useful passage (mm)	Panel width (mm)
2,685	1,720	900
3,035	1,970	1,500




### Double gate

Installation total width (mm)	Useful passage (mm)	Panel width (mm)
3,210	1,600	800
4,010	2,000	1,000
4,810	2,400	1,200
6,010	3,000	1,500

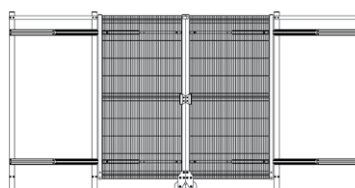

### Double gate with two panels for leaf

Installation total width (mm)	Useful passage (mm)	Panel width (mm)
5,310	3,500	900
6,010	4,000	1,000

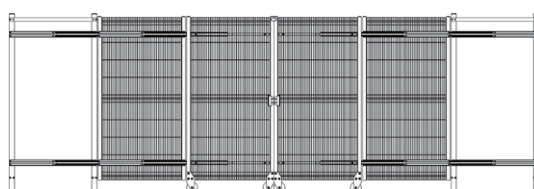

## ASSOCIATED PRODUCTS

### SAFETY LIGHT SYSTEM

- It is composed of mesh panels with folds, posts and staples with captive screws.

