

60X60 MRT POST



WARRANTY
10 YEARS



CHARACTERISTICS



To dig in



With welded base
125x125 mm

Section	60 x 60 mm	
Arm post	Welded simple arm post Length: 650 mm Option to install with panels or barbed wire. Angle: 135° to the post.	Welded double arm post Length: 650 mm Option to install with panels or barbed wire. Angle: 135° to the post, 90° between arms.
		

The arms come ready to install barbed wire with the help of the Quickfix® staple.

FINISHING FEATURES

POWDER COATING

- 10 standard RAL colours. (More than 200 RAL colours available).
- Steel galvanized sheet according to EN 10346 standard.
- Polyester powder coating by electrostatic application with microcrystalline phosphatation. Thickness: 80 microns minimum.



STANDARD DIMENSIONS

Panel height (mm)	Post length (mm)			No. of fixing accessories per post
	To dig in		With welded base	
	Short	Long		
625	800	1,000	650	2
825	1,000	1,200	850	
925	1,200	-	-	
1,025	1,200	1,500	1,050	
1,225	1,500	1,700	1,250	3
1,400	1,700	2,000	1,425	
1,525	1,700	2,000	1,550	
1,600	2,000	-	-	
1,725	2,000	-	1,750	
1,800	-	2,350	-	
2,025	2,350	2,500	2,050	4
2,425	2,750	3,200	-	

ACCESSORIES

fixing

60X60 POLYAMIDE STAPLE

- Included screws: autodrilled
- RAL colours: Green 6005 or White 9010



INSTALLATION

HÉRCULES® AND BRICO-HÉRCULES® PANELS

Distance between post axis for 2.500 mm panels

- 60x60 MRT Polyamide Staple: 2.530 mm

TWIN WIRE 6/5/6 PANELS

Distance between post axis for 2.490 mm panels


- 60x60 MRT Polyamide Staple: 2.520 mm

EXOTIC® AND ECO PANELS

Distance between post axis for 2.000 mm panels

- 60x60 MRT Polyamide Staple: 2.030 mm

End / Intermediate

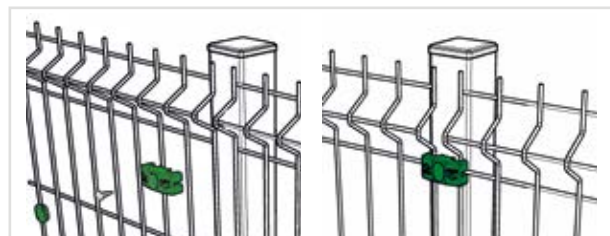

Corner

