

QUICKFIX MRT® POST

80 mm - WITH MESH




CHARACTERISTICS



To dig in



With welded base
125x125 mm

Quickfix MRT® 80 Post	
Diameter	80 mm
Arm post	Simple or double welded arm post Length: 400 or 650 mm Option to install with barbed wire Angle: 135° to the post
	



FINISHING FEATURES

POWDER COATING

- 10 standard RAL colours. (More than 200 RAL colours available).



- Steel galvanized sheet according to EN 10346 standard.
- Polyester powder coating by electrostatic application with microcrystalline phosphatation.
Thickness: 80 microns minimum.

STANDARD DIMENSIONS

Quickfix MRT® 80 System

Post Ø80 mm	End-turner Ø48 mm
1,850	1,800
2,150	2,150
2,350	2,400
3,000	

If you need Quickfix MRT® posts of 80 mm higher than 3,000 mm do not hesitate to contact us.

ACCESSORIES

fixing

MESH FIXING ACCESSORY

- Material: Galvanized steel or galvanized and powder coated steel
- Screws included
- Standard colours: Green 6005 or Galvanized



QUICKFIX MRT® STAPLE PIERS AND STAPLES

- Staples material: Galvanized steel or stainless steel



METAL TENSIONER

- Material: Galvanized steel or galvanized and powder coated steel
- Standard colours: Green 6005 or Galvanized



QUICKFIX MRT® END-TURNER 48 mm

- Material: Galvanized steel or galvanized and powder coated steel
- Standard RAL colours: same as post



INSTALLATION



How to calculate the number of posts I need for an installation?

End

1 at the beginning + 1 at the end

Reinforcement


1 every 30 m

Angle

1 each corner

Intermediate

1 every 3 m

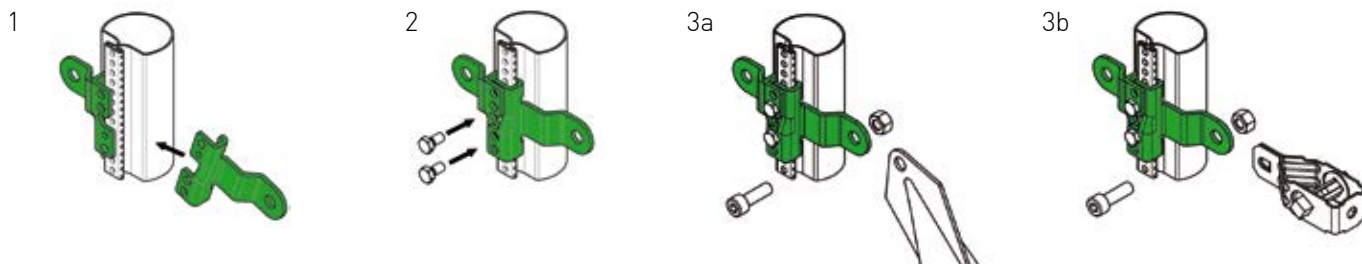


ASSOCIATED PRODUCTS



HJ MRT®



FK MRT®



XK MRT®



Jarditor®



Progressive welded mesh



Chain Link