

QUICKFIX MRT® POST

80 mm - WITH PANEL

WARRANTY
10
YEARS



CHARACTERISTICS



To dig in



With welded base
125x125 mm

Diameter

80 mm

Simple or double welded arm post

Length: 400 or 650 mm

Option to install with barbed wire

Angle: 135° to the post

Arm post



FINISHING FEATURES

POWDER COATING

- 10 standard RAL colours. (More than 200 RAL colours available).



- Steel galvanized sheet according to EN 10346 standard.
- Polyester powder coating by electrostatic application with microcrystalline phosphatation.
Thickness: 80 microns minimum.

STANDARD DIMENSIONS

Panel height	Quickfix MRT® 80 post height		
	To dig in		With welded base
	Short	Long	
625	-	-	650
825	-	-	850
1,025	-	-	1,050
1,225	-	1,850	1,250
1,400	1,850	1,850	-
1,525	1,850	2,150	1,550
1,600	2,150	2,350	-
1,725	2,150	2,350	1,750
1,800	2,350	3,000	-
2,000	2,350	-	-
2,025	2,350	3,000	2,050
2,425	3,000	-	-

ACCESSORIES

fixing

PANEL FIXING ACCESSORY

- ♦ Material: Galvanized steel or galvanized and coated
- ♦ Included screws
- ♦ RAL colours: The same as post



INSTALLATION

HÉRCULES® AND BRICO-HÉRCULES® PANELS

Distance between post axis for 2.500 mm panels

- ♦ Quickfix MRT® Fixing Accessory: 2.550 mm (+/-10)

ECO AND EXOTIC® PANELS


Distance between post axis for 2.000 mm panels

- ♦ Quickfix MRT® Fixing Accessory: 2.050 mm (+/-10)

TWIN WIRE 6/5/6 AND 8/6/8 PANELS

Distance between post axis for 2.490 mm panels

- ♦ Quickfix MRT® Fixing Accessory: 2.540 mm (+/-10)

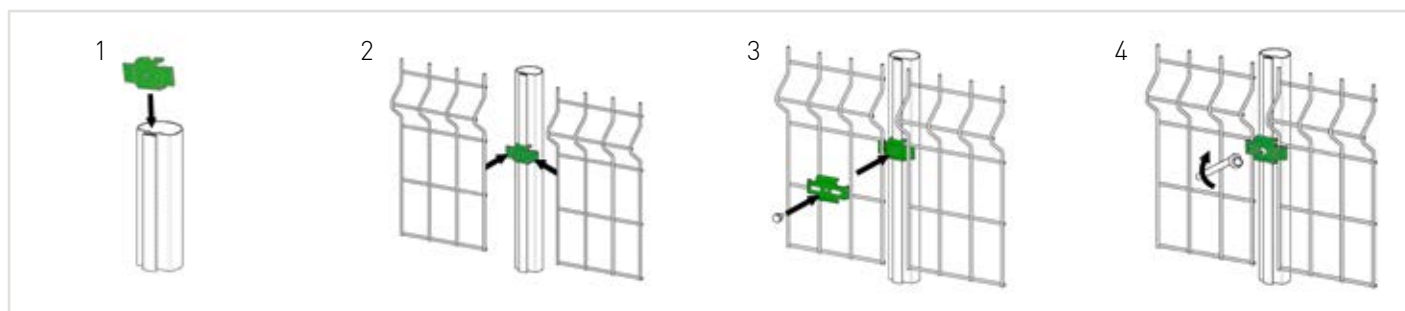

ASSOCIATED PRODUCTS



Hercules® Panel



Brico-Hercules® Panel



Eco Panel



Exotic® Panel



Twin Wire Panel