

# CANTILEVER SLIDING GATE **LIGHT** BEVELED PLUS



## CHARACTERISTICS

- Manual access.
- 2 possible opening senses, slidable to left or right.
- Gate according to EN 13241 standards.
- It's possible to install this gate with an uneven floor.

## OPTIONS

- Posts to embed or with welded base.
- Gate without lock.
- Posts with covered openings in order to pass the wiring through.

## STANDARD DIMENSIONS






Nominal width (m)	Nominal height (m)	Leaf length (mm)	Useful passage (mm)	Counter balance length (mm)	Installation total length (mm)	No. of stiffeners
3.0	1.2	4,900	2,748	1,700	8,746	1
4.0	1.5	6,200	3,748	2,000	11,046	
5.0	1.7	7,500	4,748	2,300	13,346	
6.0	2.0	8,900	5,748	2,700	15,746	2
7.0	2.2	10,500	6,748	3,300	18,346	
8.0	2.5	11,800	7,748	3,600	20,646	3

Other dimensions available upon request.

## FINISHING FEATURES

- Steel galvanized sheet according to EN 10346 standards.
- Polyester powder coating. [Amorphous phosphatation].



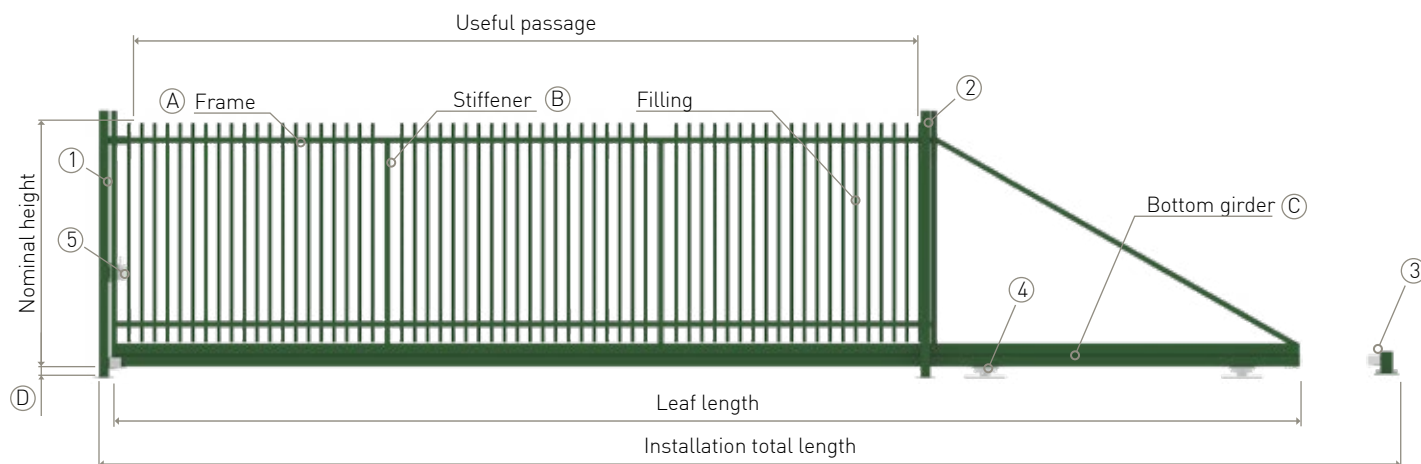

details

### POST

1	Closing column	Section: 100x100x2.0 mm Welded base: 200x200x5.0 mm Top and bottom gate receiver
2	Guide post*	Section: 100x100x2.0 mm Welded base: 200x160x5.0 mm Nylon rollers Height from 1.2 to 2.0 m simple post Height from 2.2 to 2.5 m double post

### OTHERS

3	Stop	Section: 100x100x2.0 mm Height: 295 mm Welded base: 200x200x5.0 mm Steel galvanized gate receiver
---	------	--

\* For bigger passages or with strong wind, it is recommended a second post at 1,20 m from the first one. The opening width will be reduced.

### filling

Crossing vertical bars: 25 x 25 x 1.5 mm.  
Rotated 45° and beveled on the top.  
Distance between bars: maximum 100 mm.

### LEAF

A	Frame	Nominal width from 3 to 6 m: 60x60x1.5 mm
B	Stiffener	Nominal width from 7 to 8 m: 60x60x2.0 mm
C	Bottom girder	Nominal width from 3 to 6 m: 120x60x2.0 mm Nominal width from 7 to 8 m: 120x60x3.0 mm Welded guide: 110x90x6.0 mm
D	Bottom gap	109 mm
4	Carriage (inside)	Ø 88 mm diameter Galvanized
5	Locinox® lock	European 15 cylinder Stainless mechanism