

CANTILEVER SLIDING GATE **LIGHT** CLASSIC PRO



CHARACTERISTICS

- Manual access.
- 2 possible opening senses, slidable to left or right.
- Gate according to EN 13241 standards.
- It's possible to install this gate with an uneven floor.

OPTIONS

- Posts to embed or with welded base.
- Gate without lock.
- Posts with covered openings in order to pass the wiring through.
- Defensive crest welded to the top frame.

STANDARD DIMENSIONS


| Nominal width (m) | Nominal height (m) | Leaf length (mm) | Useful passage (mm) | Counter balance length (mm) | Installation total length (mm) | No. of stiffeners |
|-------------------|--------------------|------------------|---------------------|-----------------------------|--------------------------------|-------------------|
| 3.0 | 1.2 | 4,900 | 2,748 | 1,700 | 8,746 | 1 |
| 4.0 | 1.5 | 6,200 | 3,748 | 2,000 | 11,046 | |
| 5.0 | 1.7 | 7,500 | 4,748 | 2,300 | 13,346 | |
| 6.0 | 2.0 | 8,900 | 5,748 | 2,700 | 15,746 | 2 |
| 7.0 | 2.2 | 10,500 | 6,748 | 3,300 | 18,346 | |
| 8.0 | 2.5 | 11,800 | 7,748 | 3,600 | 20,646 | 3 |

Other dimensions available upon request.


FINISHING FEATURES

- Steel galvanized sheet according to EN 10346 standards.
- Polyester powder coating. [Amorphous phosphatation].



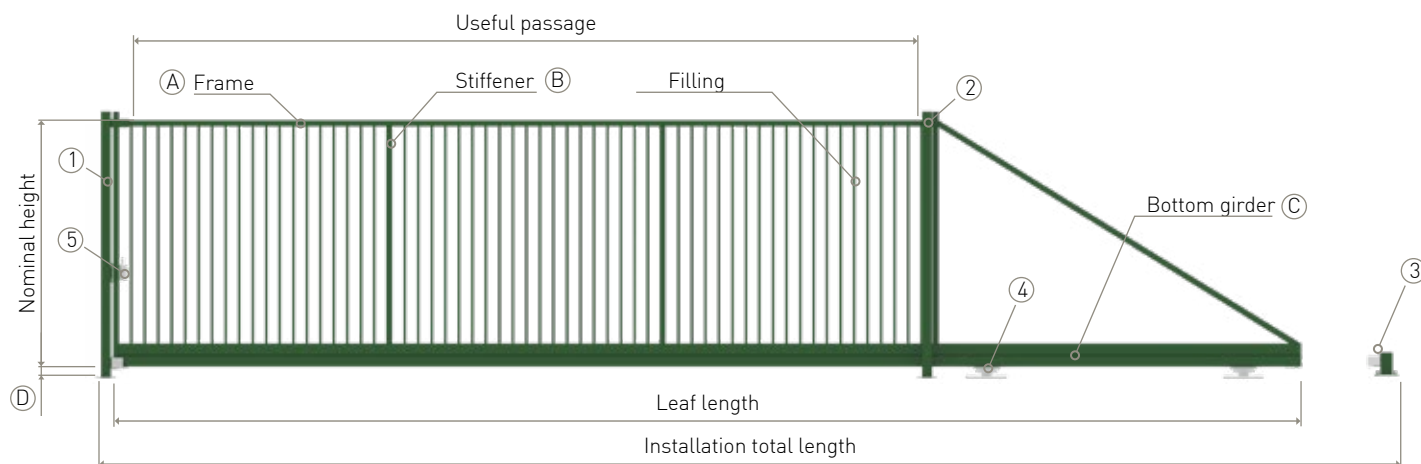

details

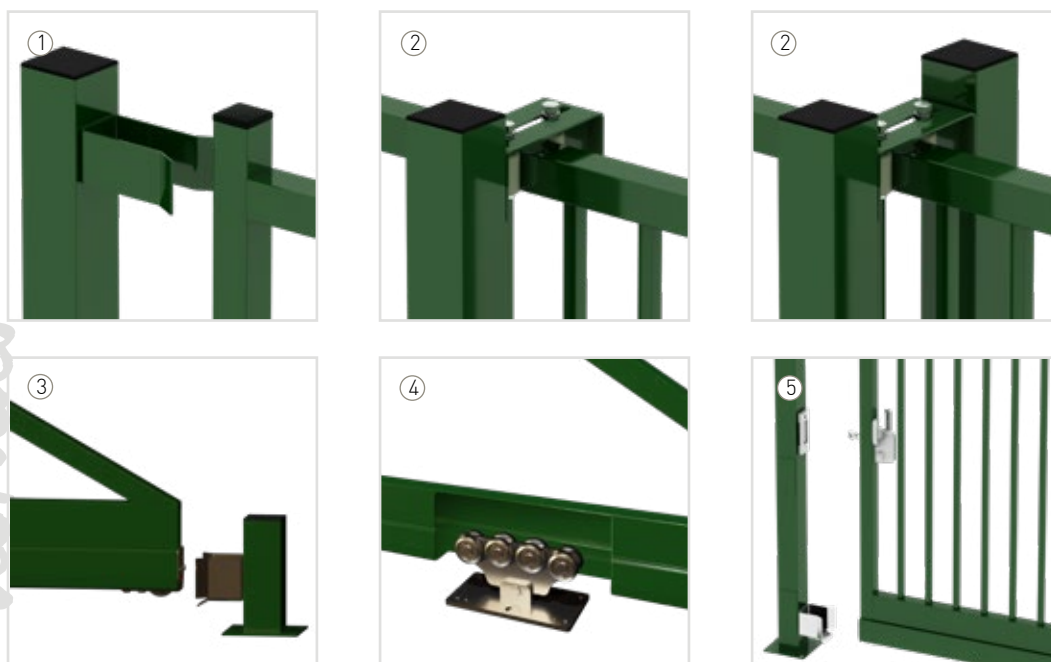

POST

| | | |
|---|----------------|---|
| 1 | Closing column | Section: 100x100x2.0 mm Welded base: 200x200x5.0 mm Top and bottom gate receiver |
| 2 | Guide post* | Section: 100x100x2.0 mm Welded base: 200x160x5.0 mm Nylon rollers Height from 1.2 to 2.0 m simple post Height from 2.2 to 2.5 m double post |

OTHERS

| | | |
|---|------|--|
| 3 | Stop | Section: 100x100x2,0 mm Height: 295 mm Welded base: 200x200x5,0 mm Steel galvanized gate receiver |
|---|------|--|

filling

Bars: 25 x 25 x 1.5 mm.
Distance between bars: maximum 110 mm.

LEAF

| | | |
|---|-------------------|---|
| A | Frame | Nominal width from 3 to 6 m: 60x60x1.5 mm |
| B | Stiffener | Nominal width from 7 to 8 m: 60x60x2.0 mm |
| C | Bottom girder | Nominal width from 3 to 6 m: 120x60x2.0 mm Nominal width from 7 to 8 m: 120x60x3.0 mm Welded guide: 110x90x6.0 mm |
| D | Bottom gap | 109 mm |
| 4 | Carriage (inside) | Ø 88 mm diameter Galvanized |
| 5 | Locinox® lock | European 15 cylinder Stainless mechanism |

* For bigger passages or with strong wind, it is recommended a second post at 1,20 m from the first one. The opening width will be reduced.