



DUO PLUS RAILING

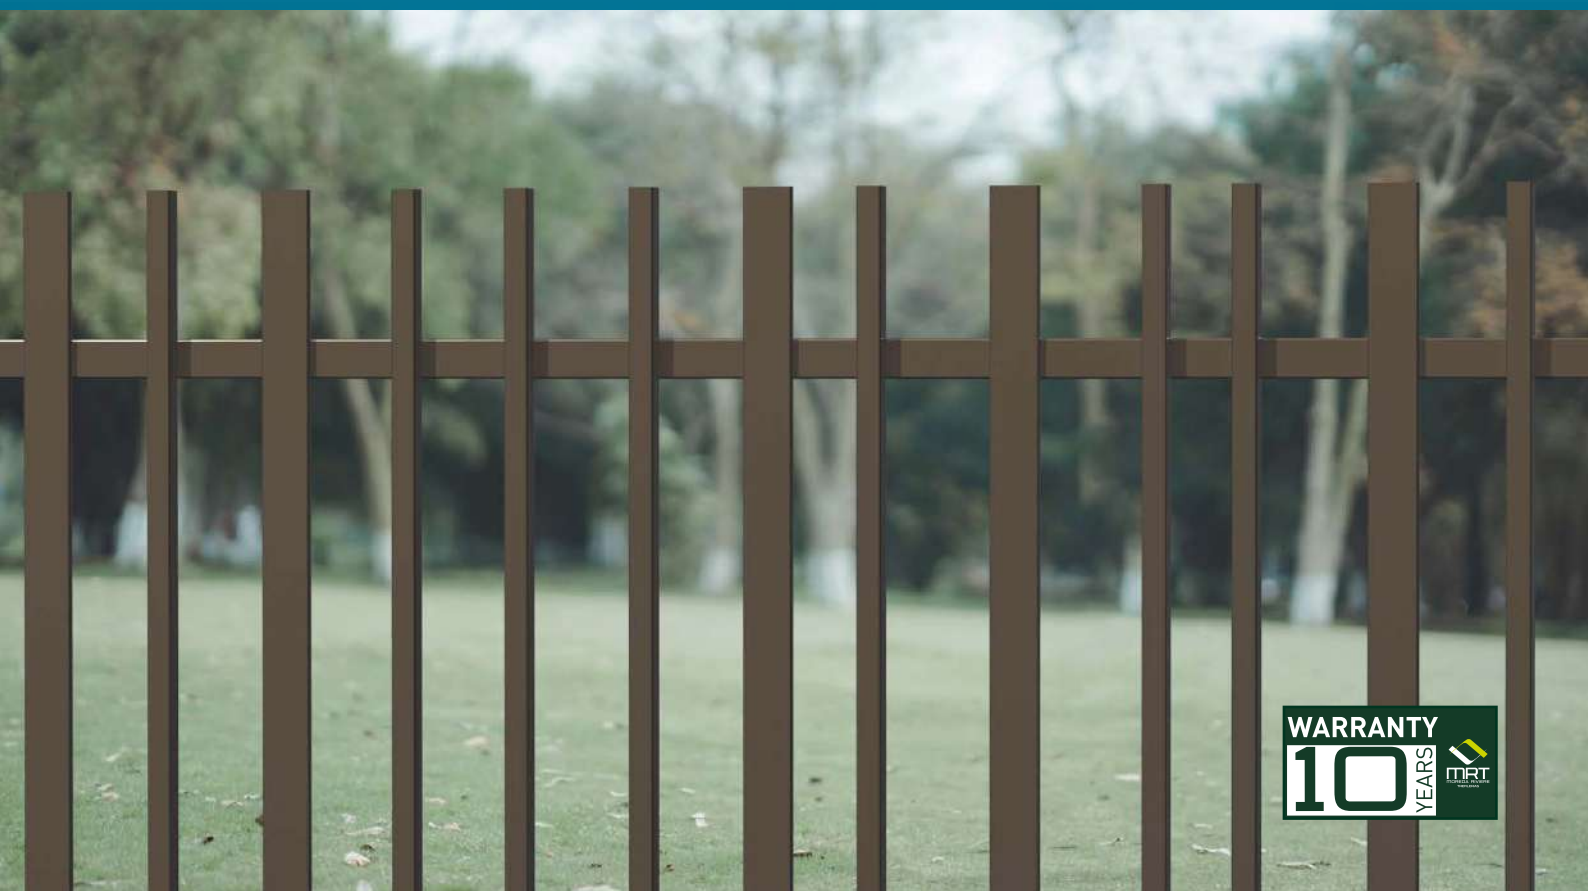

CHARACTERISTICS

Length (mm)	Horizontal profiles	Vertical bars	Distance between vertical bars
2,700	40 x 40 x 1.5 mm	alternating 50 x 10 and 25 x 25 mm bars	Between 65 and 106.5 mm

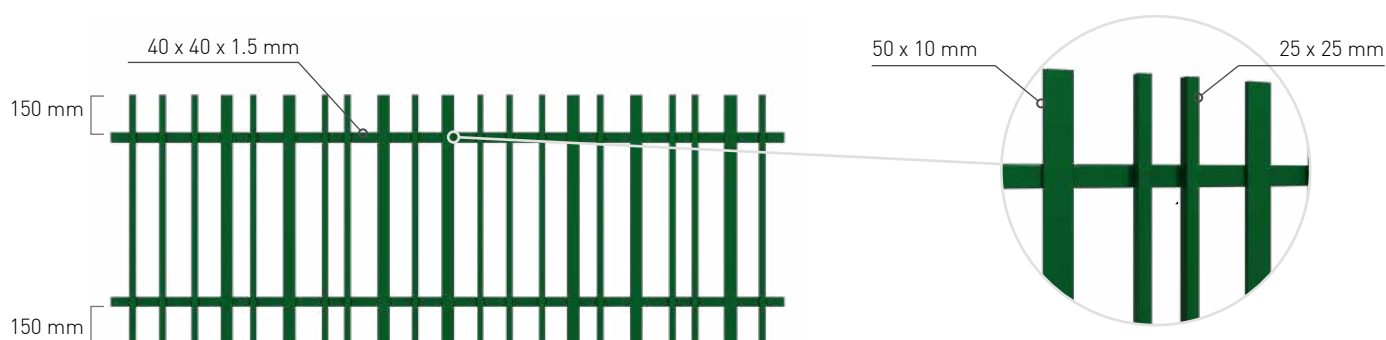

FINISHING FEATURES

POWDER COATING

- 10 standard RAL colours. (More than 200 RAL colours available).



- Steel galvanized profile according to EN 10346 standard.
- Polyester powder coated by electrostatic application with microcrystalline phosphating. Coating thickness: 80 microns minimum.

STANDARD DIMENSIONS

Railing		Post section		Post height	
Real height (m)	Length (mm)	Round (mm)	Squared (mm)	To dig in (m)	With welded base (m)
0.60	2,700	Ø 60 x 2.0	60 x 60 x 1.5	0.90	0.67
0.80				1.10	0.87
1.00				1.30	1.07
1.20				1.50	1.27
1.50				1.90	1.57
1.80				2.20	1.87
2.00		Ø 60 x 3.0	60 x 60 x 2.0	2.35 / 2.50	2.07

Other dimensions on request.

INSTALLATION

Post	Accessory	Distance between posts axis (mm)
Round	Metallic bracket	2,785 (+8/-0)
Squared	Invisible metallic fastener	2,760

It's easy to adapt the gate to the desired length.

METALLIC BRACKET

- Adjustable in height
- All possible angles
- Screws included



End / Intermediate / Angle



INVISIBLE METALLIC FASTENING ACCESSORY

- Screws included.
- Two type of screws:
 - End / Intermediate
 - Corner



End / Intermediate



Corner



VARIABLE ANGLE FIXING ACCESSORY

This accessory allows to create variable angles up to $\pm 50^\circ$, it replaces the metallic fastening accessory.

