


EXOTIC® PANEL



CHARACTERISTICS

Wire diameter (mm)	Geometry (mm)	Length (mm)	Height (mm)
5.00	Distance between horizontal wires 300 mm. Vertical wires randomly distributed.	2,000	925
			1,225
			1,525


Double horizontal wire on end rods

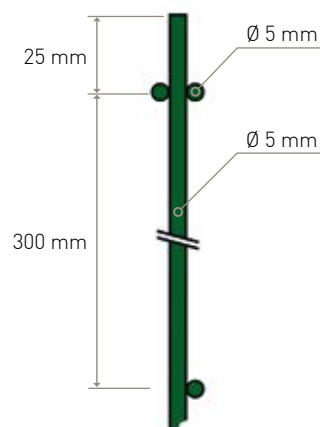

FINISHING FEATURES


POWDER COATING

- 10 standard RAL colours. (More than 200 RAL colours available).



- Hot dip galvanized wire according to EN 10244-2, welded panel according to EN 10223-7.
- Polyester powder coating by microcrystalline phosphatation. Polyester thickness: 100 microns minimum.

STANDARD DIMENSIONS

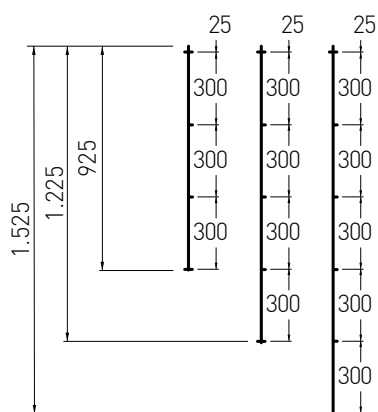

INSTALLATION

Post	Accessory	Distance between posts axis (mm)
Easyclip®	Polyamide / Aluminium / Stainless Bracket	2,020
Profix®	-	2,040
Hércules®	Hércules® Bracket	2,025 (+10/-20)
	Ultrafix® Bracket	2,025 (+10/-20)
	Hércules® Staple	2,025 (+/-10)
Quickfix MRT®	Polyamide / Metallic Bracket	2,020
	Quickfix MRT® Accessory for panels	2,050 (+/-10)
60x60 MRT	Polyamide Staple	2,030 (+10/-5)

ASSOCIATED PRODUCTS

EXOTIC® PANEL GATE

- Swing gate with single leaf or double leaf.



PANEL ACCESSORY

- Fix the panel directly to the gate post.



WALL ACCESSORY

- Fix the panel to a wall without using posts.

