


300x50 FRAMED PLUS RAILING



CHARACTERISTICS

Length (mm)	Horizontal profiles	Vertical profiles	Mesh	Wire diameter
2,700	40 x 40 x 1.5 mm	30 x 30 x 1.5 mm	300 x 50 mm *	Vertical 5 mm Horizontal 6 mm

* Other dimensions available

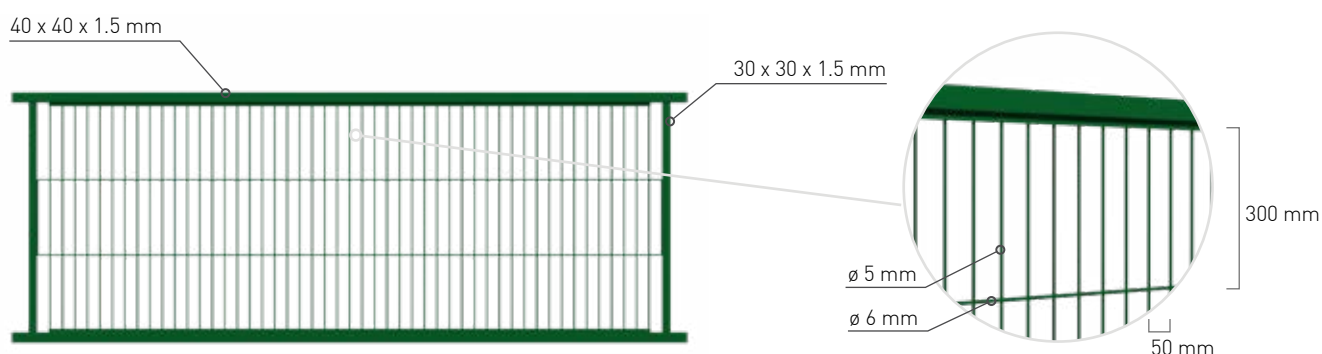

FINISHING FEATURES

POWDER COATING

- 10 standard RAL colours. (More than 200 RAL colours available).
- Steel galvanized profile according to EN 10346 standard and steel galvanized wire according to EN 10244-2.
- Polyester powder coated by electrostatic application with microcrystalline phosphating. Coating thickness: 80 microns minimum.



STANDARD DIMENSIONS

Railing		Post section		Post height	
Real height (m)	Length (mm)	Round (mm)	Squared (mm)	To dig in (m)	With welded base (m)
0.70	2,700	Ø 60 x 2.0	60 x 60 x 1.5	1.00	0.77
1.00				1.30	1.07
1.30				1.65	1.37
1.60				2.00	1.67
1.90		Ø 60 x 3.0	60 x 60 x 2.0	2.35	1.97
2.20				2.70	-

Other dimensions on request.

INSTALLATION

Post	Accessory	Distance between posts axis (mm)
Round	Metallic bracket	2,785 (+8/-0)
Squared	Invisible metallic fastener	2,760

METALLIC BRACKET

- Adjustable in height
- All possible angles
- Screws included



End / Intermediate / Angle



INVISIBLE METALLIC FASTENING ACCESSORY

- Screws included.
- Two type of screws:
 - End / Intermediate
 - Corner



End / Intermediate



VARIABLE ANGLE FIXING ACCESSORY

This accessory allows to create variable angles up to $\pm 50^\circ$, it replaces the metallic fastening accessory.




Corner



ASSOCIATED PRODUCTS

FINISHING ACCESSORY

- Allows to easily adapt the gate to the desired size, cutting a standard gate.

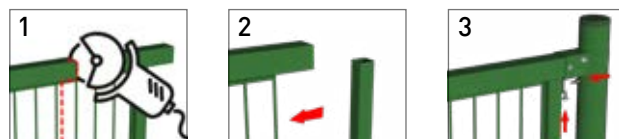

MRT CLASSIC MESH SWING GATE

- Single leaf or double leaf.
- Filling:
 - Mesh: 50 x 50 mm.
 - Wire diameter: 4.00 mm.

SLIDING GATE - FRAMED PLUS

- Light and Pro version.
- It slides on a guide bolted to the ground.
- Filling:
 - Mesh: 300 x 50 mm.
 - Wire diameter: V 5.00 mm - H 6.00 mm.

CANTILEVER SLIDING GATE - FRAMED PLUS

- It is not necessary to install a guide on the ground.
- Filling:
 - Mesh: 300 x 50 mm.
 - Wire diameter: V 5.00 mm - H 6.00 mm.