

HJ MRT® STOCK FENCE


Medium [C]



PROPERTIES

- Progressive stock fencing.
- Class A Heavy galvanized wire according to EN 10244-2 standards.
- Made according to EN 10223-5 standards.
- Horizontal wires come with crimps between each knot to add tension to the wire and assist with water run off.

Hinge joint

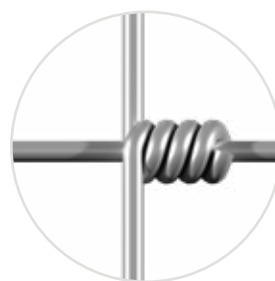


Height (mm)	Top and bottom wires		Infill horizontal wires		Vertical wires	
	Diameter (mm)	Tensile strength (kg/mm ²)	Diameter (mm)	Tensile strength (kg/mm ²)	Diameter (mm)	Tensile strength (kg/mm ²)
From 600 to 2,000	3.00	≥ 71	2.45	≥ 71	2.45	45 - 55

OTHER COATING OPTIONS

- Heavy galvanized + 2H ECOVER®
- Heavy galvanized + ECOVER®
- ZnAl®
- Other standards available (ASTM, SAE, BS, AS/NZS...)



STANDARD DIMENSIONS

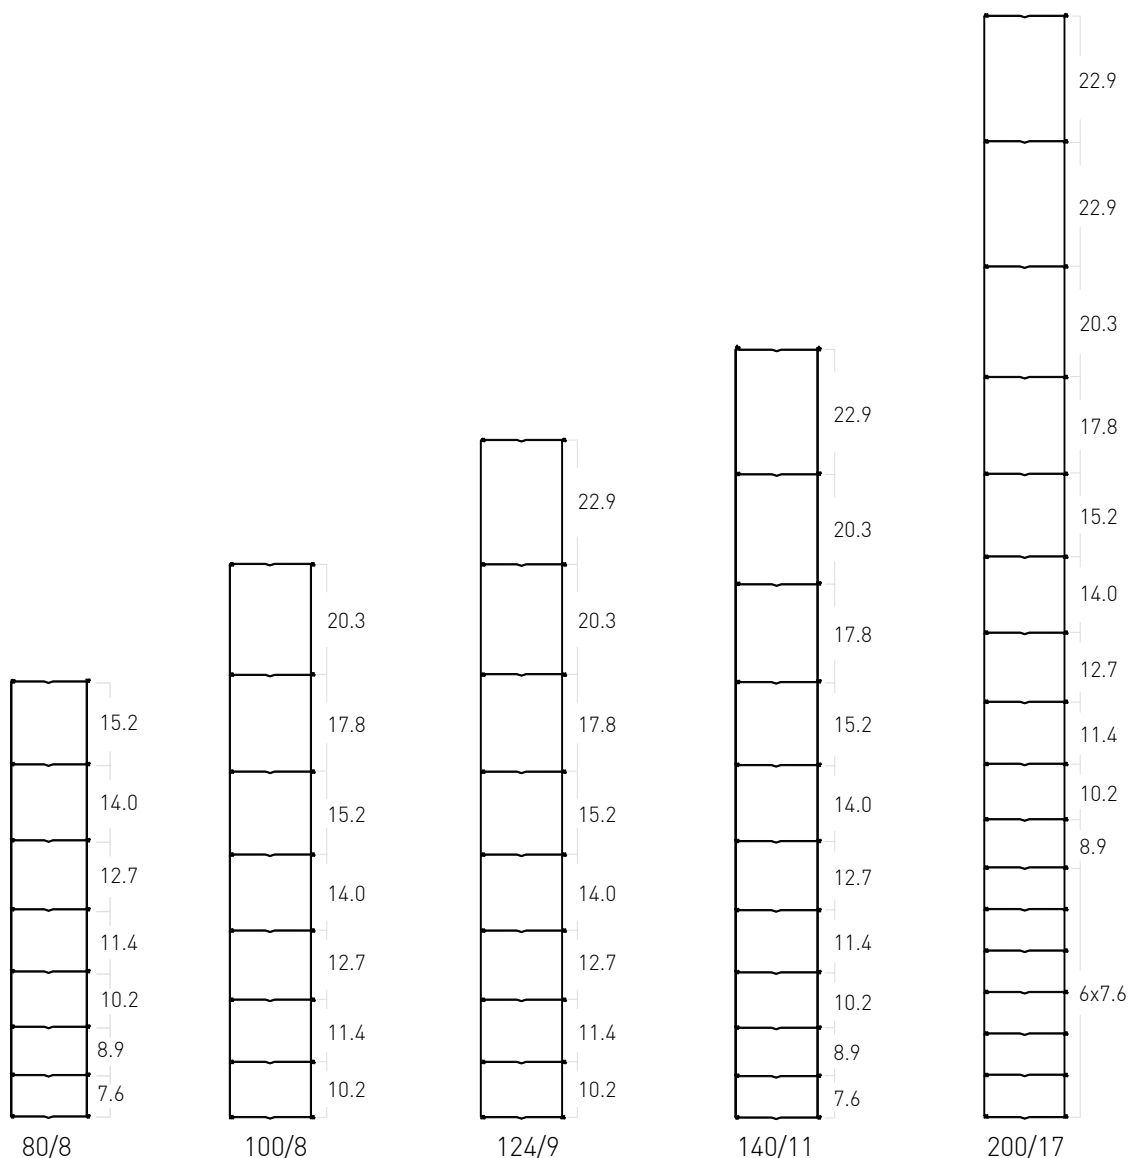

Type	Height (cm)	No. of horizontal wires	Distance between vertical wires (cm)	Roll length (m)
80/8	80	8	15	50
100/8	100	8		
124/9	124	9		
140/11	140	11		
200/17	200	17		

Other dimensions available upon request.