


HÉRCULES® PANEL



CHARACTERISTICS

Wire diameter (mm)	Mesh (mm)	Length (mm)	Height (mm)	Number of bends
5.00	200x55	2,500	625	2
			825	2
			1,025	2
			1,225	2
			1,525	3
			1,725	3
			1,925	3
			2,025	4
			2,225	4
			2,425	4

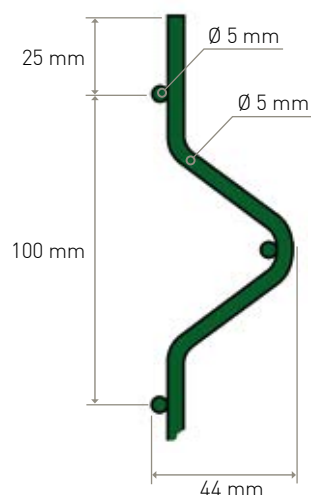

FINISHING FEATURES


POWDER COATED

- 10 Standard RAL colours. (More than 200 RAL colours available).
- Other available finishes.



- Hot dip galvanized wire according to EN 10244-2, welded panel according to EN 10223-7.
- Polyester powder coating by microcrystalline phosphatation. Polyester thickness: 100 microns minimum.

STANDARD DIMENSIONS

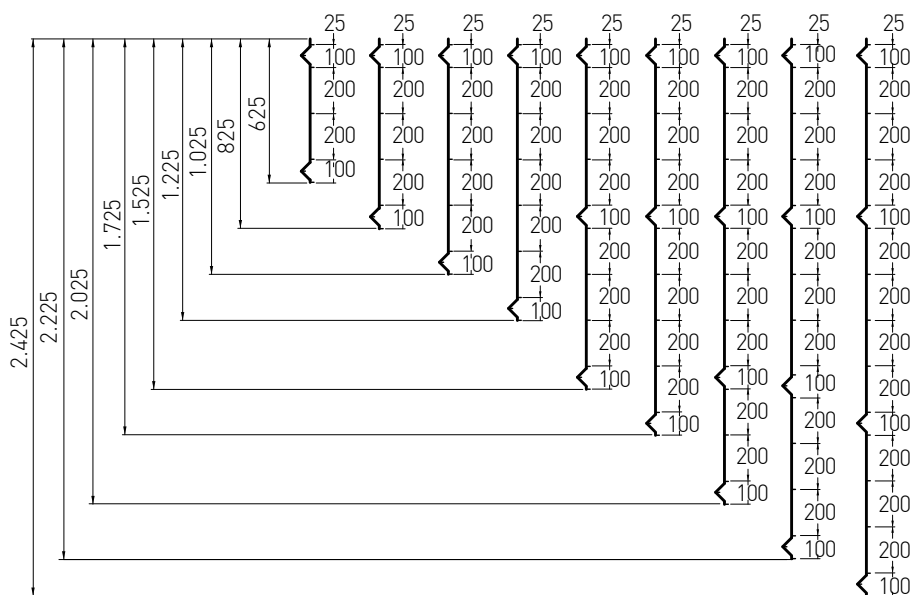

INSTALLATION

Post	Accessory	Distance between posts axis (mm)
Easyclip®	Polyamide / Aluminium / Stainless Bracket	2,520
Profix®	-	2,540
Hércules®	Hércules® Bracket	2,525 (+10/-20)
	Ultrafix® Bracket	2,525 (+10/-20)
	Hércules® Staple	2,525 (+/-10)
Quickfix MRT®	Polyamide / Metallic Bracket	2,520
	Quickfix MRT® Accessory for panels	2,550 (+/-10)
60x60 MRT	Polyamide Staple	2,530 (+10/-5)

ASSOCIATED PRODUCTS

MRT PRIVACY KIT

- Provide privacy to your perimeter fence with the Privacy Kit composed by PVC slats.

REWOOD PRIVACY KIT

- 100% recyclable composite wood slats for achieve total opaque fence.

PANEL ACCESSORY

- Fix the panel directly to the gate post.



WALL ACCESSORY

- Fix the panel to a wall without using posts.



MRT GATES

- Swing Gates, Sliding Gates and Cantilever Sliding Gates

