

ROUND Ø60 POST FOR RAILING



WARRANTY
10
YEARS



CHARACTERISTICS

Diameter	60 mm	
Profile's thickness	2.00 mm	3.00 mm



To dig in



With welded base
125x125 mm

not crossing railing



crossing railing



FINISHING FEATURES

POWDER COATING

- 10 standard RAL colours. (More than 200 RAL colours available).
- Steel galvanized sheet according to EN 10346 standard.
- Polyester powder coating by electrostatic application with microcrystalline phosphatation. Thickness: 80 microns minimum.



STANDARD DIMENSIONS

Railing Height (m)	Post Height (m)		Post Section (mm)
	To dig in	With welded base	
0.60	0.90	0.67	Ø60 x 2.00
0.80	1.10	0.87	
1.00	1.30	1.07	
1.20	1.50	1.27	
1.50	1.90	1.57	
1.80	2.20	1.87	
2.00	2.35 / 2.50	2.07	Ø60 x 3.00
2.40	2.90	-	

ACCESSORIES

fixing


METALLIC BRACKET

- Adjustable in height
- All possible angles
- Screws included



Reversible bracket to fit


Brackets must be put interspersed so that the railing is aligned.

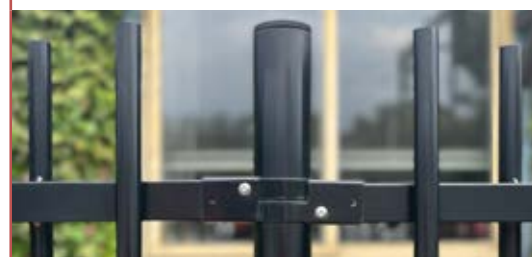

INSTALLATION

- Distance between axis:
Railing length 2,700 mm: 2,785 (+8/-0) mm
Railing length 2,475 mm: 2,560 (+8/-0) mm

End / Intermediate / Angle

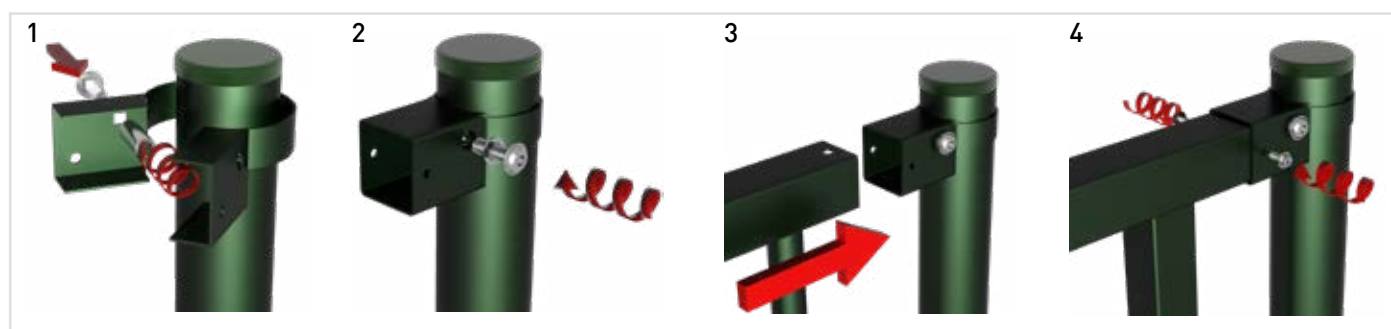

ASSOCIATED PRODUCTS



Bar Railing



Bali® Railing




Beveled Railing



Framed Railing



Exotic® not Crossing Railing



Perforated Railing

