

SLIDING GATE LIGHT FRAMED PLUS



CHARACTERISTICS

- Manual access.
- 2 possible opening senses, slidable to left or right.
- Gate according to EN 13241 standards.

OPTIONS

- Posts to embed or with welded base.
- Guide rail to screw or to embed.
- Gate without lock.
- Posts with covered openings in order to pass the wiring through.
- Defensive crest welded to the top frame.

STANDARD DIMENSIONS


Nominal width (m)	Nominal height (m)	Leaf length (mm)	Useful passage (mm)	Guide length (mm)	Installation total length (mm)	No. of wheels	No. of stiffeners
3.0	1.2	3,680	2,758	5,380	7,220	2	1
4.0		4,680	3,758	6,880	9,220		
5.0	1.5	5,680	4,758	8,380	11,220	4	2
6.0	1.7	6,680	5,758	9,880	13,220		
7.0	2.0	7,680	6,758	11,770	15,220	4	3
8.0	2.2	8,680	7,758	13,270	17,220		
	2.5						

Other dimensions available upon request.


FINISHING FEATURES

- Steel galvanized sheet according to EN 10346 standards and steel galvanized wires according to EN 10244-2 standards.
- Polyester powder coating. (Amorphous phosphatation).



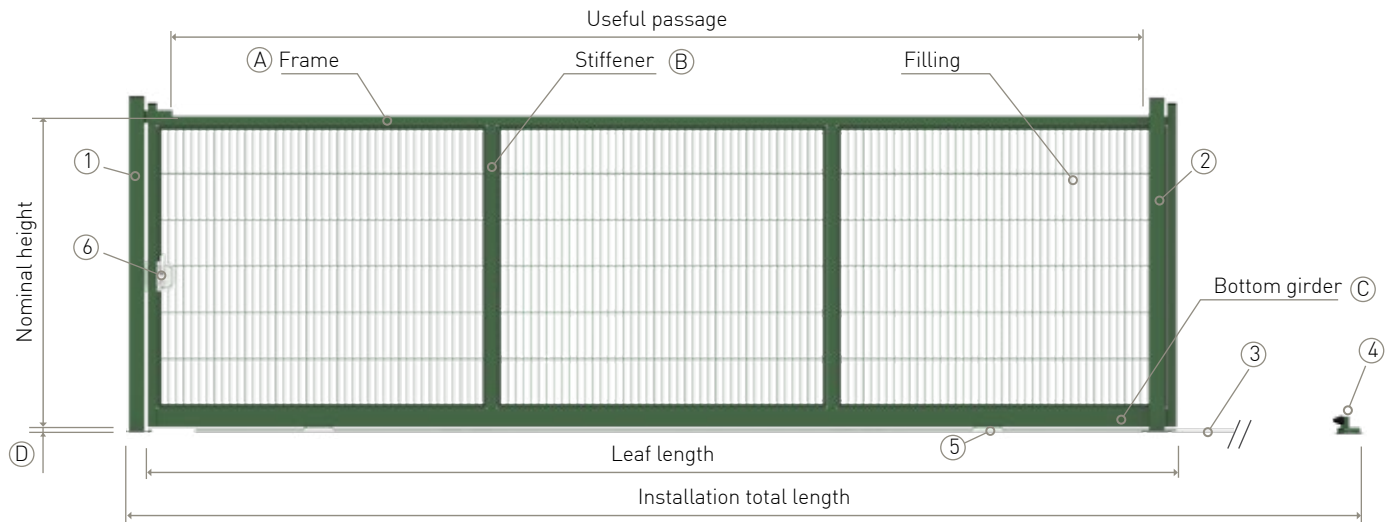

details

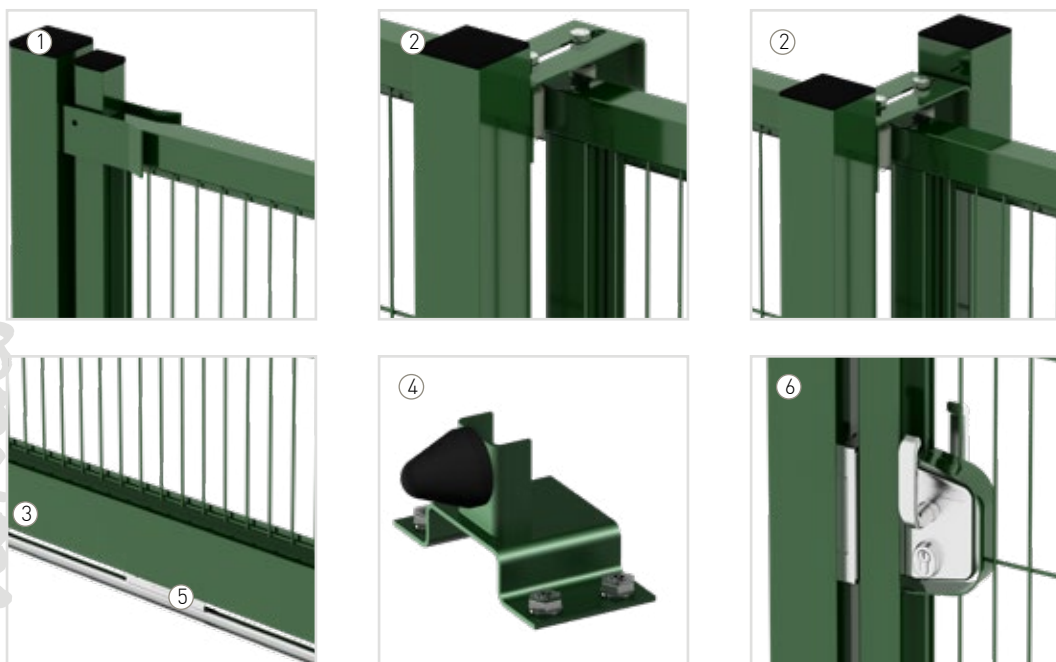

filling

Mesh: 300 x 50 mm.
Horizontal wire: Ø6.0. Vertical wire: Ø5.0 mm.

POST		
1	Closing column	Section: 100x100x2.0 mm Welded base: 200x200x5.0 mm Gate receiver
2	Guide post*	Section: 100x100x2.0 mm Welded base: 200x160x5.0 mm Nylon rollers Height from 1.2 to 2.0 m simple post Height from 2.2 to 2.5 m double post

OTHERS		
3	Guide rail	U-shaped Ø 20 mm
4	Stop	Rubber stop

HOJA		
A	Frame	Ancho de paso de 3 a 6 m: 60x60x1,5 mm
B	Stiffener	Ancho de paso de 7 a 8 m: 60x60x2,0 mm
C	Bottom girder	Ancho de paso de 3 a 6 m: 120x60x2,0 mm Ancho de paso de 7 a 8 m: 120x60x3,0 mm (Para altura 2,5 m: 2 perfiles extra)
D	Distancia al suelo	37 mm
5	Ruedas	Rueda Ø120 mm de acero galvanizado Ranura en U de Ø20 mm
6	Cerradura Locinox®	Cilindro europeo de 15 Mecanismo inoxidable

* For bigger passages or with strong wind, it is recommended a second post at 1.2 m from the first one. The opening width will be reduced