

SWING GATE

CLASSIC MESH



WARRANTY
10 YEARS


CHARACTERISTICS

- Manual access.
- Variable post section according to the gate size.
- Gate supplied preassembled and easy access to its Declaration of Performance.
- Posts to dig in.
- **Other variations:** Base plated posts.

Filling

Mesh: 50 x 50 mm.

Steel galvanized wires with powder coated: Ø 4.0 mm.

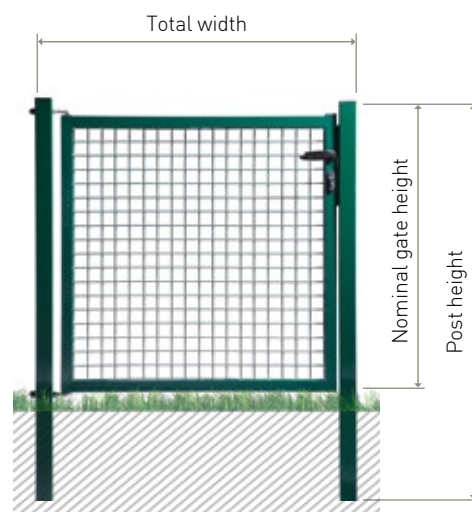

COMPONENTS

LOCK

- European cylinder: 60 mm (30-30 symmetric).
- Stainless mechanism.
- Set of keys included.



LOCINOX® HINGE

- Stainless steel.
- Adjustable from 15 to 35 mm.
- 90° opening.
- Reversible: interior / exterior opening.



GROUND STOP AND DROP BOLT: (double leaf gates only).



STANDARD DIMENSIONS

SINGLE LEAF GATE

POST SIZE / HEIGHT (mm)		Nominal gate width (m)					
		1.0	1.2	1.5	2.0	2.5	3.0
Nominal gate height (m)	1.0	60x60 / 1,495				-	-
	1.2	60x60 / 1,695				-	-
	1.5	60x60 / 1,995			80x80 / 2,045		
	1.7	60x60 / 2,195			80x80 / 2,245		100x100 / 2,295
	2.0	60x60 / 2,495		80x80 / 2,545		100x100 / 2,595	

FRAME SIZE (mm)	40x40					
-----------------	-------	--	--	--	--	--

PASSAGE (mm)	930	1,130	1,430	1,930	2,430	2,930
--------------	-----	-------	-------	-------	-------	-------

DOUBLE LEAF GATE

POST SIZE / HEIGHT (mm)		Nominal gate width (m)					
		2.0	3.0	3.5	4.0	5.0	6.0
Nominal gate height (m)	1.0	60x60 / 1,495				-	-
	1.2	60x60 / 1,695				-	-
	1.5	60x60 / 1,995			80x80 / 2,045		
	1.7	60x60 / 2,195		80x80 / 2,245			100x100 / 2,295
	2.0	60x60 / 2,495	80x80 / 2,545			100x100 / 2,295	

FRAME SIZE (mm)	40x40					
-----------------	-------	--	--	--	--	--

PASSAGE (mm)	1,900	2,900	3,400	3,900	4,900	5,900
--------------	-------	-------	-------	-------	-------	-------



How to calculate the TOTAL GATE WIDTH?

Nominal gate width (mm) + (2 x post size (mm)) + 15 mm for **single leaf gate** or 20 mm for **double leaf gate**.

ASSOCIATED PRODUCTS

HÉRCULES® PANEL

- Mesh: 200 x 55 mm.
- Galvanized and powder coated wire: Ø 5.0 mm.

PANEL ACCESSORY

- This accessory allows to fixate the panel directly to the gate's column without adding the fist post.

BASE PLATE

- Suitable for single leaf gates with a 1.2 m maximum width.

DEFENSIVE CREST

- Bolted to the top frame, reinforces the security.



FINISHING FEATURES

- Steel galvanized sheet according to EN 10346 and hot dip galvanized wire according to EN 10244-2 standards.
- Polyester powder coating, microcrystalline phosphating by a process of electrostatic application. Polyester thickness: 80 microns minimum.

