

SWING GATE

EXOTIC® PANEL



CHARACTERISTICS

- Manual access.
- Variable post section according to the gate size.
- Gate supplied preassembled and easy access to its Declaration of Performance.
- Posts to dig in.
- **Other variations:** Base plated posts.

Filling

Ø 5.0 mm steel galvanized vertical wires with powder coated, it's randomly disposition.
300 mm horizontal wire distance.



COMPONENTS

LOCK

- European cylinder: 60 mm (30-30 symmetric).
- Stainless mechanism.
- Set of keys included.



LOCINOX® HINGE

- Stainless steel.
- Adjustable from 15 to 35 mm.
- 90° opening.
- Reversible: interior / exterior opening.



GROUND STOP AND DROP BOLT: (double leaf gates only).



STANDARD DIMENSIONS


SINGLE LEAF GATE

POST SIZE / HEIGHT (mm)		Nominal gate width (m)		
		1.0	1.2	1.5
Nominal gate height (m)	0.9	60x60 / 1,495		
	1.2	60x60 / 1,795		
	1.5	60x60 / 2,095		
FRAME SIZE (mm)		40x40		
PASSAGE (mm)		910	1,170	1,445
TOTAL WIDTH (mm)		1,115	1,375	1,650

DOUBLE LEAF GATE

POST SIZE / HEIGHT (mm)		Nominal gate width (m)	
		3.0	4.0
Nominal gate height (m)	0.9	60x60 / 1,495	
	1.2	60x60 / 1,795	
	1.5	60x60 / 2,095	80x80 / 2,145
FRAME SIZE (mm)		40x40	
PASSAGE (mm)		2,930	3,760
TOTAL WIDTH (mm)		3,170	4,000 *


* TOTAL WIDTH: for 4.0 m double leaf gate nominal width x 1.5 m height nominal is 4,040 mm

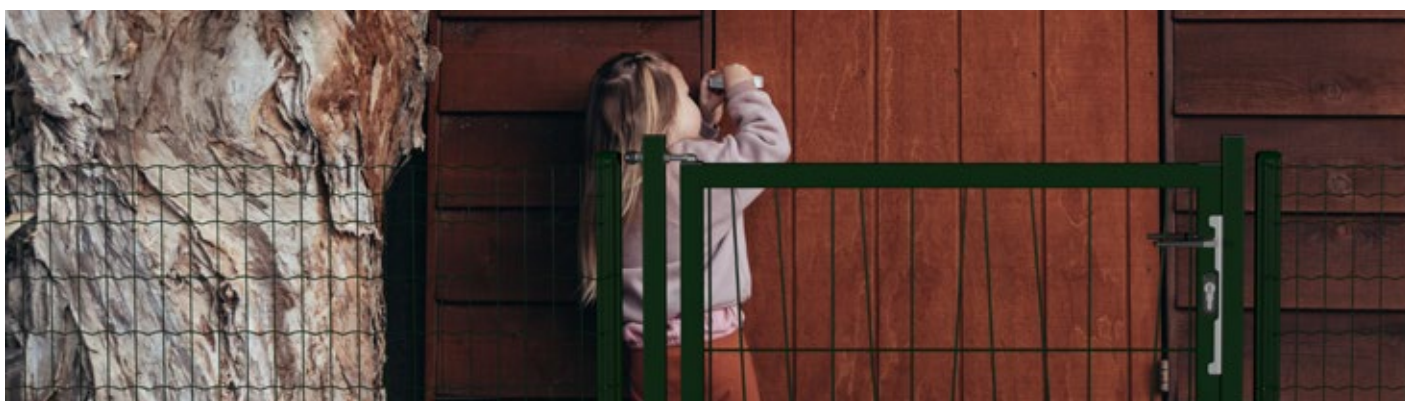

ASSOCIATED PRODUCTS

EXOTIC® PANEL

- Ø 5.0 mm wires with powder coated.
- Double horizontal wires on the top and bottom.



PANEL ACCESSORY

- This accessory allows to fixate the panel directly to the gate's column without adding the fist post.



BASE PLATE

- Suitable for single leaf gates with a 1.2 m maximum width.



FINISHING FEATURES

- Steel galvanized sheet according to EN 10346 and hot dip galvanized wire according to EN 10244-2 standards.
- Polyester powder coating, microcrystalline phosphating by a process of electrostatic application. Polyester thickness: 80 microns minimum.

