

TWIN WIRE PANEL




WARRANTY
10
YEARS



CHARACTERISTICS

Type	Wire diameter (mm)	Mesh (mm)	Length (mm)	Height (mm)
Twin wire 6-5-6	Vertical 5.00 - Horizontal 6.00	200x55	2,490	1,000
				1,400
				1,600
				1,800
				2,000
Twin wire 8-6-8	Vertical 6.00 - Horizontal 8.00	200x55	2,490	800
				1,400
				1,600
				1,800
				2,000

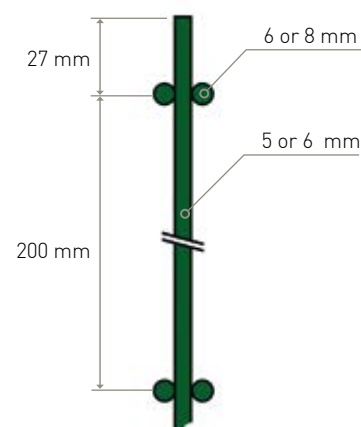

FINISHING FEATURES

POWDER COATING


- 10 standard RAL colours. (More than 200 RAL colours available).
- Other finishes available.




- Hot dip galvanized wire according to EN 10244-2, welded panel according to EN 10223-7.
- Polyester powder coating by microcrystalline phosphatation. Polyester thickness: 80 microns minimum.

STANDARD DIMENSIONS

GEOMETRY 6 - 5 - 6

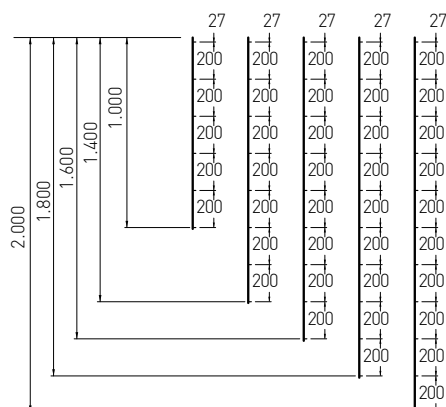

GEOMETRY 8 - 6 - 8

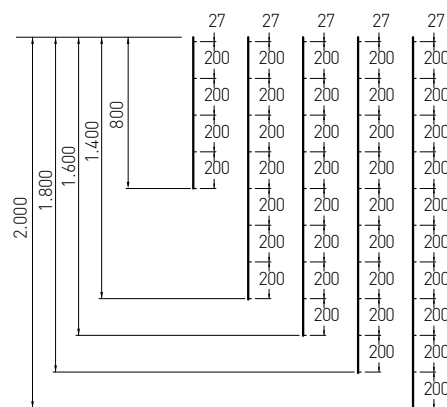

INSTALLATION

Post	Accessory	Distance between posts axis (mm)	
		Twin wire 6-5-6	Twin wire 8-6-8
Easyclip®	Polyamide / Aluminium / Stainless Bracket	2,510	2,510
Profix®	-	2,530	-
Hércules®	Hércules® Bracket	2,515 (+10/-20)	-
	Ultrafix® Bracket	2,515 (+10/-20)	-
	Hércules® Staple	2,515 (+/-10)	-
Quickfix MRT®	Polyamide / Metallic Bracket	2,510	-
	Quickfix MRT® Accessory for panels	2,540 (+/-10)	2,540 (+/-9)
60x60 MRT	Polyamide Staple	2,520 (+10/-5)	-

ASSOCIATED PRODUCTS

MRT GATES

- Multiple choices of Swing Gates, Sliding Gates and Cantilever Sliding Gates.

