


# Moreda Riviere Trefilerías

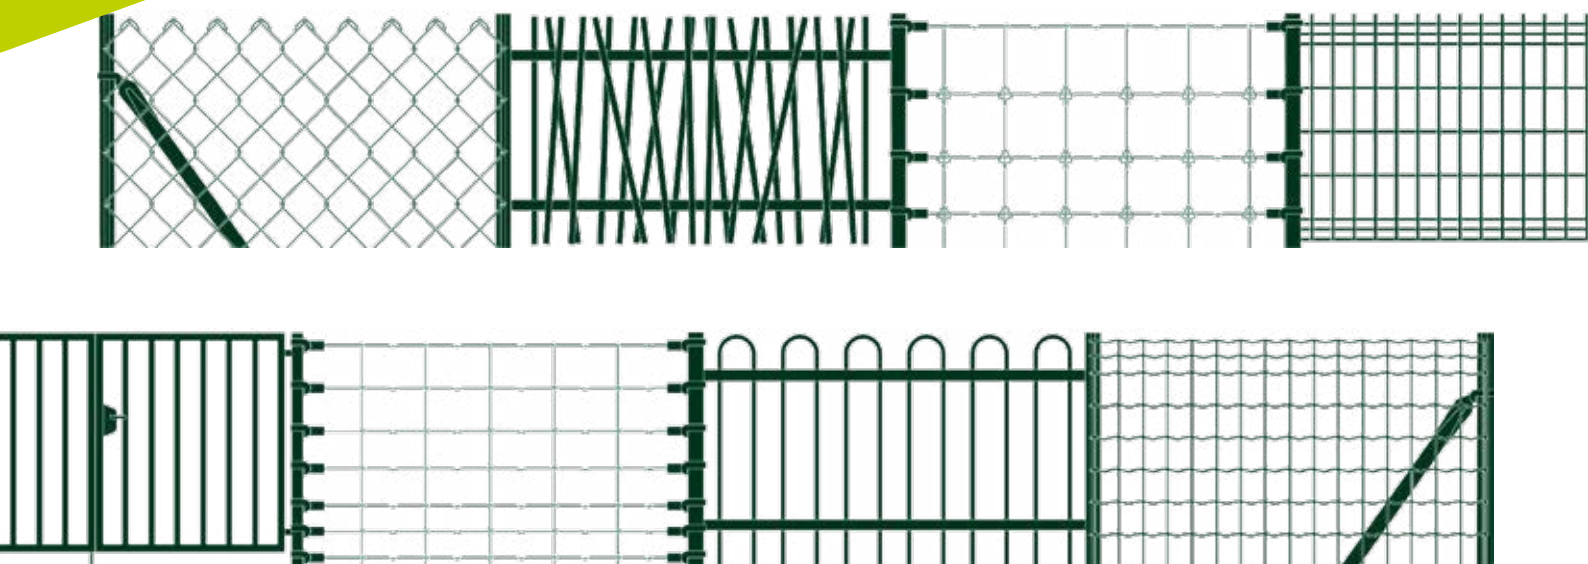

CATALOGUE EXPORT

# MRT PRESENTATION

## MRT IN ESSENCE

Moreda Riviere Trefilerías (MRT) is the leading fencing manufacturer in Spain and one of the main references in Europe. Accordingly, MRT offers a wide range for residential, professional, industrial and agricultural sectors.

MRT is part of the Celsa group, the leader in Europe for the production of circular steel with low CO<sub>2</sub> emissions.

It is more than 150 years of experience, MRT masters all production processes. In fact, it offer a warranty of quality products, like a complete customer service. This would not have been possible without MRT professionals; they are focus on continuous improvement, to achieve the excellence in the business management (TQM).

The MRT professionals efforts made possible a continuous increase through the years, but should be seen in the perspective that the development was possible prioritizing a policy that respects the environment. As a result, MRT holds ISO 14001:2015 certification for the manufacturing of low-carbon steel fencing and wire drawing, under an environmental management system (SGM).



## MRT figures



LEADER  
in Spain



2 PRODUCTION SITES  
Gijón: 85.000 m<sup>2</sup>  
Barcelona: 180.000 m<sup>2</sup>



400+  
employees



60+  
countries



150+ YEARS  
of experience

MRT is strongly committed to its people's talent; embracing the essential human quality along with the foresight to undertake new projects with passion. Perseverance and non-conformity are values that characterize its professionals. The professionals are not only the heartbeat that keep company alive, but also an essential part of their history and identity.

We are *#Celsafamily*

*Honesty*



*Humility*



*Creative perseverance*



*Groundbreaking approach*



*Teamwork*



*Passion*



## Safety a priority

MRT constantly strives to ensure an injury and illness-free work environment for everyone who participates in its activities. The Occupational Health and Safety Management System (SG-SST) has a whole series of programs implemented far beyond the legal requirements, emphasising the priority given to this key objective.

For example, the efforts undertaken to completely eliminate the use of triglycidyl isocyanurate (TGIC) in the manufacture of its plasticized products led to the awarding of ISO 45001:2018 certification.

**TGIC FREE**  
NON-TOXIC COATING



## MRT at your side

The CUSTOMER PORTAL is a private area for each client from which you can get useful information, streamlining business management in real time: Order book access; shipment tracking; download documents as order confirmations, delivery notes, certificates and invoices; user management and presentation of new products.

Create your account in [cp.gcelsa.com](http://cp.gcelsa.com) and discover its advantages.

## THE STRENGTH OF CELSA



5+ million tonnes produced annually



7+ million tonnes recycled annually



10,000+ direct and subcontracted professionals employed



4,000+ million euros of annual turnover

The Celsa group produces steel in electric arc furnaces, using the most sustainable and energy-efficient technology from recycled ferrous scrap. By opting, since beginning, to manufacture steel from the recycling of ferrous materials, Celsa has a production model that is part of a sustainable development approach, thus leading the circular transformation. Nowadays, it is already defined as “Low Carbon” company.

It is made up of 4 business groups, has 120 work sites, 7 steel mills, 12 rolling mills and 45 recycling plants, including transformation and distribution companies such as MRT.

Furthermore, far from settling for this, Celsa has set the following main objectives: By 2030, reduce CO<sub>2</sub> emissions (scope 1 and 2) by 50% and achieve 98% circularity. By 2050, be a “Net Positive” company.

**CELSEA**

Transforming today.  
Strengthening tomorrow.

## VERTICAL INTEGRATION AND CIRCULARITY

The group is increasingly vertically integrated, both upstream and downstream. This integration throughout the steel production chain allows for synergies to be achieved more efficiently; both environmentally and energy-wise, with the facilities to implement continuous improvement with excellent traceability throughout.

From the purchase of raw materials throughout the transformation into finished products, through the wire rod drawing process, wire galvanizing, welding and wire braiding, everything is done within Celsa and MRT.

*We are manufacturers*



06.25



# GUIDE

## COLOUR LIST

### GLOSSY FINISH, 10 STANDARD RAL

From 10 units if the reference is not stockable \*



### MORE THAN 200 OPTIONS

From 10 units \*

Finish RAL colours:

GLOSSY

Finish RAL colours:

MATTE


Other finish RAL colours:

TEXTURE, OXIDON, SANDBLASTED...

\* Considering Panels, Posts, Railings and Gates.

## LEGEND

### SYMBOLS

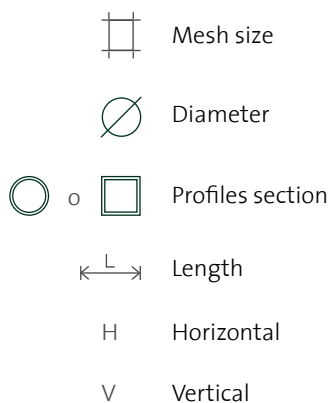

### WARRANTY



10 Years warranty.  
Consult applicable conditions.

### NEW



Product recently added  
to the catalogue

### FINISHING



**Commercial galvanized** - CLASS D -  
standard - EN 10244-2

**Heavy galvanized** - CLASS A -  
standard - EN 10244-2



**Heavy galvanized (CLASS A) +  
Ecover®**



**ZnAl®**  
95% Zinc and 5% Aluminium  
(CLASS A, B or AB)



**Galvanized and Powder Coating**  
10 standard RAL colours and more  
than 200 colours and finishing.



**Post-galvanized**  
Hot-dip galvanized product



**Bord de mer**  
Post-galvanized + Powder Coating



**Galvanized and PVC Coating**  
By fluidization or extrusion

## 1. MESH PANELS

### A - Residential Panels

Brico-Hércules® .....	6
ECO .....	6
Exotic® .....	6

### B - Professional Panels

Hércules® .....	7
Twin Wire .....	7
MRT Privacy Kit .....	7
ReWood Composite Privacy Kit .....	7

## 2. RAILINGS RANGE

Framed Plus .....	8
Bar Plus .....	8
Beveled Plus .....	8
Exotic® Plus .....	8
Not Crossing Exotic® Plus .....	8
Bali® Plus .....	9
Perforated Plus .....	9
Ondas Plus .....	9
Diabolo Plus .....	9
Crossing Tubes Plus .....	9
Tubes Plus .....	10
Helix Plus .....	10
Bubble Plus .....	10
Dominio 1 5 .....	10
Duo .....	10

## 3. JARDITOR® ET FLORITOR® IN ROLLS

### A - Jarditor®

Jarditor® Brico .....	11
Jarditor® Classic .....	11
Jarditor® Super .....	11

### B - Floritor®

Floritor® .....	11
-----------------	----

## 4. CHAIN LINK IN ROLLS

Galvanized Chain Link .....	12
Galvanized & PVC Coated Chain Link .....	12

## 5. POSTS

### A - Residential Range

T Post .....	13
Quickfix MRT® Post .....	13
Preassembled Post .....	13

### B - Professional Range

Easyclip® Post .....	14
Profix® Post .....	14
Hércules® Post .....	14
Square 60x60 Post .....	15
Wall Accessory .....	15

### C - Railing Range

Round Ø 60 Post .....	15
Square 60x60 Post .....	15

### D - Installation Accessories

Line wire, tie wire, tensioners, staples & staple pliers .....	16
--	----

## 7. SECURITY

MRT Security .....	17
--------------------	----

## 6. SAFETY

Safety Light MRT System .....	18
Safety Heavy MRT System .....	19

## 8. GATES

### A - Swing Gates

#### A1 - Residential Range

ECO .....	20
Residential .....	20
Exotic® Panel .....	20

#### A2 - Professional Range

Classic Mesh .....	21
Hércules® .....	21
Diabolo Plus .....	22
Pro and Plus gates .....	22
Pro and Plus gates fillings .....	23

### B - Sliding Gates

Light .....	24
Pro .....	24

### C - Cantilever Sliding Gates

Light .....	25
-------------	----

Sliding and Cantilever gates fillings .....	26
---	----

## 9. STOCK FENCING

### A - HJ MRT® Stock Fence

HJ MRT® Range .....	27
---------------------	----

### B - Agrotor® Premium Stock Fence

Agrotor® Premium .....	28
------------------------	----

### C - XK MRT® Stock Fence

XK MRT® Range .....	28
---------------------	----

### D - FK MRT Stock Fence

FK MRT® Range .....	29
---------------------	----

## 10. PROGRESSIVE WELDED MESH

Progressive Welded Mesh .....	30
-------------------------------	----

## 11. ELECTRO-WELDED MESH

Welded mesh Roll .....	30
Badger Fence .....	30

## 12. WIRE NETTING MESH

Wire Netting mesh .....	30
-------------------------	----

## 13. BARBED WIRE & BARBLESS WIRE

### A - Barbed Wire

Erizo® & Dardo® Barbed Wire .....	31
Iowa & Bravo® Barbed Wire .....	31

### B - Barbless Wire

Barbless Wire MRT .....	31
-------------------------	----

## 14. WIRE

Wire .....	32
------------	----

## 15. NAILS & FENCING STAPLES

Nails & Fencing Staples .....	32
-------------------------------	----

## 16. OTHERS

Mosquito Netting .....	33
Welded Mesh Panels .....	33
Mobile Fencing .....	33
Clothesline .....	33

## 17. GENERAL SALE TERMS & CONDITIONS

Ts & Cs of sale .....	34
-----------------------	----

# MESH PANELS

The powder coated welded panels guarantee robustness and aesthetics to the closure.  
Complementary posts: HÉRCULES®, QUICKFIX®, PROFIX®, EASYCLIP® and 6x6o MRT.

## A - RESIDENTIAL PANELS



Excellent price/quality.

### BRICO-HÉRCULES®

Ø 4.0 mm

100x55 mm

Height (mm)

From 625 to 2,025

Length (mm)

2,500

Finish

Galvanized & powder coated



The ideal solution for your garden.

### ECO

Ø 4.0 mm

200x55 mm

Height (mm)

From 625 to 2,025

Length (mm)

2,500

Finish

Galvanized & green or grey powder coated



### EXOTIC® PANEL

Ø 5.0 mm

Randomly distributed vertical welded wires

Height (mm)

925 / 1,225 / 1,525

Length (mm)

2,000

Finish

Galvanized & powder coated



An aesthetic and economical solution. Double horizontal wire on the top and bottom of the fence.



# HÉRCULES® PANEL

## A - PROFESSIONAL PANELS



### HÉRCULES®

∅ 5,0 mm

200x55 mm

Height (mm) **From 625 to 2,425**

Length (mm) **2,500**

Finish Galvanized & powder coated / Post-galvanized / Bord de mer



The market benchmark. It's ideal for industrial estates, office buildings, airports, parks and gardens.



### TWIN WIRE

∅ V 5,0 mm  
H 6,0 mm

or ∅ V 6,0 mm  
H 8,0 mm

200x55 mm

Height (mm) **From 800 to 2,000**

Length (mm) **2,490**

Finish Galvanized & powder coated / Post-galvanized / Bord de mer



Optimal strength and rigidity for sites that demand a high level of security.



### MRT PRIVACY KIT

Height (mm) **1,025 / 1,225 / 1,525 / 1,725 / 1,925 / 2,025\***

Panel length (mm) **2,000\*\* / 2,500**

Colours



PVC slats

It's compatible with all our panels with bends of 2.0 and 2.5 m length and requires no maintenance.

\* 2,025 height: Available only in 2,500 mm length in green or anthracite colour.  
\*\* Length 2,000: Available only from 1,025 to 1,525 mm height in green or anthracite.




### REWOOD COMPOSITE PRIVACY KIT

Height (mm) **1,025 / 1,225 / 1,525 / 1,725 / 1,925**

Panel length (mm) **2,500**

Colours



Composite slats

Made up of 85% recycled material. It's compatible with the Hércules® panel. Requires no maintenance.

# RAILINGS RANGE

MRT's railings combine safety, robustness and elegance.

The top and bottom profiles of all MRT's railings range are 40x40x1.5 mm, so all ranges are compatible with the railing posts and the railing accessories.



Wire V 5.0 mm  
Wire H 6.0 mm

## FRAMED PLUS

2,700 mm Mesh  
300x50 mm

Height (mm)

**From 700 to 2,200**

Finish

Galvanized & powder coated / Post-galvanized /  
Bord de mer



Not crossing bars  
35x35x1.5 mm

## BAR PLUS

2,700 mm Space between bars  
90 mm

Height (mm)

**From 600 to 2,400**

Finish

Galvanized & powder coated / Post-galvanized /  
Bord de mer



Crossing bars  
25x25x1.5 mm at 45°

## BEVELED PLUS

2,700 mm Space between bars  
91.72 mm

Height (mm)

**From 600 to 2,000**

Finish

Galvanized & powder coated / Post-galvanized /  
Bord de mer



Crossing bars  
Ø 25x1.5 mm

## EXOTIC® PLUS

2,475 mm

Height (mm)

**From 600 to 2,400**

Finish

Galvanized & powder coated / Post-galvanized /  
Bord de mer



Not crossing bars  
Ø 25x1.5 mm

## NOT CROSSING EXOTIC® PLUS

2,475 mm

Height (mm)

**From 600 to 2,400**

Finish

Galvanized & powder coated / Post-galvanized /  
Bord de mer






□ Crossing bars  
25x25x1.0 mm

## BALI® PLUS

← L → 2,475 mm

Height (mm)	<b>From 600 to 2,400</b>
Finish	Galvanized & powder coated / Post-galvanized / Bord de mer

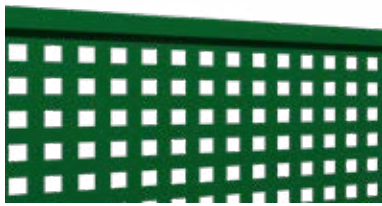

□ Galvanized plate Thickness 1.5 mm Perforations 30x30 mm

## PERFORATED PLUS

← L → 2,475 mm

Height (mm)	<b>From 600 to 1,500</b>
Finish	Galvanized & powder coated



○ Crossing bars  
Ø 20x1.5 mm

## ONDAS PLUS

← L → 2,700 mm Space between bars 100 mm

Height (mm)	<b>From 600 to 2,000</b>
Finish	Galvanized & powder coated / Post-galvanized / Bord de mer



○ Not crossing bars  
Ø 25x1.5 mm

## DIABOLO PLUS

← L → 2,475 mm Space between bars 70 mm

Height (mm)	<b>From 600 to 2,000</b>
Finish	Galvanized & powder coated / Post-galvanized / Bord de mer



○ Crossing bars  
Ø 20x1.5 mm

## CROSSING TUBES PLUS

← L → 2,700 mm Space between bars 100 mm

Height (mm)	<b>From 600 to 2,000</b>
Finish	Galvanized & powder coated / Post-galvanized / Bord de mer



# RAILINGS RANGE



○ Crossing bars  
Ø 20x1.5 mm

## TUBES PLUS

↔ 2,700 mm

Space between bars  
100 mm

Height (mm)

**From 600 to 2,000**

Finish

Galvanized & powder coated / Post-galvanized /  
Bord de mer



○ Not crossing bars  
Ø 35x1.5 mm

## HELIX PLUS

↔ 2,700 mm

Space between bars  
79 mm

Height (mm)

**From 600 to 2,400**

Finish

Galvanized & powder coated



○ Not crossing bars  
Ø 35x1.5 mm

## BUBBLE PLUS

↔ 2,700 mm

Space between bars  
79 mm

Height (mm)

**From 600 to 2,400**

Finish

Galvanized & powder coated



□ Crossing bars  
10x50 mm

**NEW**

## DOMINO 1|5

↔ 2,475 mm

Space between bars  
109.5 mm

Height (mm)

**From 600 to 2,400**

Finish

Galvanized & powder coated



□ Crossing bars  
10x50 mm & 25x25 mm

**NEW**

## DUO

↔ 2,700 mm

Space between bars  
65 - 106.5 mm

Height (mm)

**From 600 to 2,000**

Finish


Galvanized & powder coated



# JARDITOR® AND FLORITOR® IN ROLLS

Jarditor® is a PVC coated welded mesh, ideal for fencing gardens and residential areas. Its wavy horizontal wires and its upper edge give good aesthetics and robustness. The mesh can be tightened using the tension tool, which increase the crimps of the horizontal wires.

## A - JARDITOR®

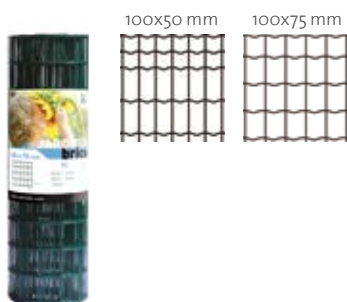

The economy version.

<b>JARDITOR® BRICO</b>		Ø 2.1 mm	Roll 10 / 25 m
Height (mm)	From 600 to 2,000		
Mesh (mm)	100x50 / 100x75		
Finish	Galvanized & PVC coated by fluidisation		

\* It's only available for Jarditor® Brico 100x50 from 1 to 1.5 m high.



The universal version.

<b>JARDITOR® CLASSIC</b>		Ø 2.5 mm	Roll 25 m
Height (mm)	From 600 to 2,000		
Mesh (mm)	50x50** / 100x50		
Finish	Galvanized & PVC coated by fluidisation		

\* It's only available for Jarditor® Classic 100x50 from 1 to 2 m high.

\*\* It's only available in 1, 1.5 and 2.0 m high.



The premium version.

<b>JARDITOR® SUPER</b>		Ø 3.0 mm	Roll 25 m
Height (mm)	From 1,000 to 2,000		
Mesh (mm)	50x50		
Finish	Galvanized & PVC coated by fluidisation		

## B - FLORITOR®

To delimit the flowerbeds, gardens and orchards.



<b>FLORITOR®</b>		Ø V 3.0 mm H 2.0 mm	Roll 10 m
Height (mm)	400 / 650 / 900		
Mesh (mm)	155x85		
Finish	Galvanized & PVC coated by extrusion		

# CHAIN LINK IN ROLLS

Characterized by its diamond-shaped meshes, the chain link mesh is the guarantee of an economical perimeter solution that fits all types of ground. Its installation can be done with either Quickfix®, Preassembled or T-posts. Line wires are not supplied with the rolls, you should be ordered separately.



**Knuckled edge**  
Available for all  
diameters and finishes



**Barbed edge (twisted)**  
Galvanized finish from 1.8 to 2.7 mm  
PVC coated finish from 2.4 to 3.7 mm



GALVANIZED		From 1.8 to 3.9 mm	Roll 10 / 12.5 / 15 / 18 / 25 m
Height (mm)	From 500 to 4,000		
Mesh (mm)	30x30 / 40x40 / 50x50		
Roll type	Compact / Non-compact *		
Finish	Class D galvanized / Class A galvanized		




\* Check the available heights and diameters.



PVC COATED		From 1.5/2.4 to 3.0/4.4 mm	Roll 10 / 12.5 / 15 / 18 / 20 / 25 m
Height (mm)	From 500 to 4,000		
Mesh (mm)	40x40 / 50x50		
Roll type	Compact / Non-compact *		
Finish	Galvanized & PVC coated by extrusion		



\* Check the available heights and diameters.

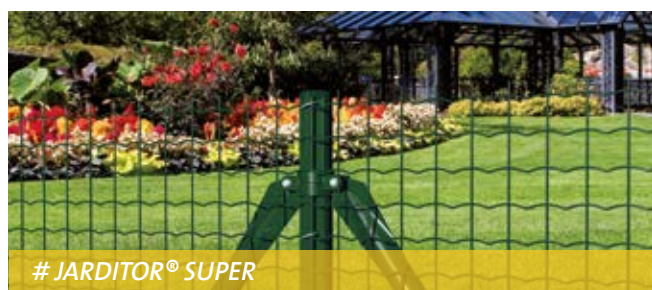

# JARDITOR® SUPER




# FLORITOR®



# GREEN PVC COATED CHAIN LINK

## A - RESIDENTIAL RANGE

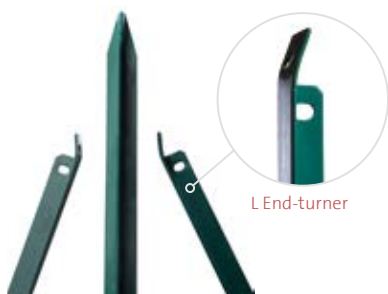

### T-POST

- ☐ Powder coated post  
30x30 mm  
35x35 mm (h 2.5 m)
- ☐ Post-galva post  
30x30 mm  
35x35 mm (h 2.0 y 2.5 m)

Height (mm)	From 1,000 to 2,500
End-turner (mm)	25x25 (Powder coated) / 30x30 (Post-galvanized)
Finish	Powder coated on grey steel / Post-galvanized**



It can be installed with chain link mesh and with Jarditor® welded mesh.

\* Available in 1.5, 1.75 and 2.0 m high.  
\*\* Available in 1.5, 1.75, 2.0 and 2.5 m high.



### QUICKFIX MRT® 48 & 80

- ☐ Post  
ø 48 / 80 mm

Height (mm)	From 650 to 3,000
End-turner (mm)	ø 38 / 48 mm
Finish	Galvanized / Galvanized & Powder coated



Its round profile and its zipper allow quick and easy installation. Post with optional welded base.

### accessories

1- Bracket:  
Polyamide / Metallic



2- Metallic Fixing Accessory  
for: Panel / Mesh



3- Polyamide  
Post Base



4- Polyamide  
End-turner Base



OPTION: Defensive Arm Post



### PREASSEMBLED POST

- ☐ Post  
ø 48 mm

Height (mm)	From 1,250 to 2,350
End-turner (mm)	ø 38 mm
Version	End / Intermediate / Reinforcement / Angle
Finish	Galvanized / Galvanized & Powder coated



It's supplied with all accessories assembled.

### accessories

1- Steel Post Base



2- Steel End-turner Base



# POSTS

## B - PROFESSIONAL RANGE



### EASYCLIP®

 Post  
66x50 mm

Height (mm)

**From 700 to 3,200**

Finish

Galvanized / Galvanized & Powder coated / Post-galvanized /  
Bord de mer



High strength and adaptability. It allows 90° angles and absorbs all degrees of gradient. Post with optional welded base (125x125 mm).

#### accessories

1- Easyclip® Bracket  
polyamide / aluminium / stainless



2- Easyclip® Post Bases  
aluminium / steel / frontal steel



3- Reversible  
Arm Post



4- Double welded  
Arm Post



### PROFIX®

 Post  
66x50 mm

Height (mm)

**From 700 to 2,700**

Finish

Galvanized / Galvanized & Powder coated



This post does not require accessories. It is an inviolable system. Quick and easy to install solution.  
Post with optional welded base (125x125 mm).

#### accessories

1- Bag of 12 Blockers



2- Profix® Post Bases  
aluminium / ECO aluminium / steel / frontal steel



3- Repair Post



### HÉRCULES®

 Post  
60x40 mm

Height (mm)

**From 650 to 3,200**

Finish

Galvanized / Galvanized & powder coated / Post-galvanized /  
Bord de mer



This rectangular post allows sequential installation (all posts and then all panels).  
Post with optional welded base (125x125 mm).

#### accessories

1- Polypropylene  
Hércules® Bracket



2- Steel Ultrafix®  
Bracket



3- Steel  
Hércules® Staple



4- Hércules®  
Post Union



5- Hércules® Base:  
aluminium / steel



6- Reversible or Double  
welded Arm post





## 60x60 MRT

Post  
60x60 mm

Height (mm)

From 650 to 3,200

Finish

Galvanized / Galvanized & powder coated / Post-galvanized / Bord de mer



This square post allows the sequential installation (all posts and then all panels). Post with optional welded base (125x125 mm).

### accessories

1- Polyamide Staple



2- Welded Arm Post



3- Double welded Arm Post



## WALL ACCESSORY

Material  
Stainless steel

Dimensions (mm)  
45x40x8.0

This accessory is used to attach a panel in a wall without using a post.

## C - RAILINGS RANGE



## ROUND Ø60

Post  
Ø60 mm

Height (mm)

From 670 to 2,900

Finish

Galvanized / Galvanized & Powder coated / Post-galvanized / Bord de mer



It's compatible with all models of MRT railings. The clamp allows you to make all kinds of angles. Post with optional welded base (125x125 mm).

### accessories

1- Metallic Bracket



## SQUARE 60x60

Post  
60x60 mm

Height (mm)

From 670 to 2,900

Version

Intermediate / Corner

Finish

Galvanized / Galvanized & Powder coated / Post-galvanized / Bord de mer



Post square pre-perforated at different heights according to the model of railing that you want to install, either crossing or not crossing bars. Post with optional welded base (125x125 mm).

### accessories

1- Metallic Invisible fastener



2- Metallic Variable Angle Attachment



## D - INSTALLATION ACCESSORIES



Wire designed for stretching a mesh for better installation.

### LINE WIRE

Ø From 1.6 to 2.8 mm

Roll length (m) \*

**50 / 100**

Finish:

Galvanized / Galvanized & PVC coated



\* For other displays see page 32.



Wire for fixing the mesh to the line wire, replacing the staples.

### TIE WIRE

Ø From 0.75 to 1.5 mm

Roll length (m)

**50**

Finish:

Galvanized / Galvanized & PVC coated



For stretching a mesh between posts.

### QUICKFIX MRT® TENSIONERS

Dimensions (mm)

**90x25x46**

Finish:

Galvanized / Powder coated



It allows to fix the mesh to the Quickfix MRT® zipper post.

### STAPLE PIERS & STAPLES QUICKFIX MRT®

Staples finish

Galvanized / Stainless steel



Baby Graf

Top Graf with  
charger

Allows fast and easy fixing mesh to the line wire, it replaces the tie wire.

### STAPLE PIERS & STAPLES

Piers type

Baby Graf 16-20 / Top Graf 20-22  
with charger

Staples dimensions and finishes

**n° 16 galv. / n° 20 PVC coated.**

## MRT SECURITY

MRT Security is synonymous with the latest technology in the market for intrusion detection and perimeter security. We evaluate projects according to the clients' requirements and provide customized solutions to fulfil their needs. Technology, quality and service combine to offer the solution most suited to afford the most comprehensive security:



Risk assessment



Comprehensive security plans



Project management and monitoring



Custom projects



Design and engineering



Installation and maintenance

## PERIMETER PROTECTION

### VIDEO ANALYTIC



### PIEZOELECTRIC SENSORS ON FENCE



### GEO-SEISMIC CABLE FOR FOOTSTEP DETECTION



## VIDEO ANALYSIS

### SECURITY



### MARKETING



### MARKETING & SECURITY




### PROCESS CONTROL





## A - MRT SAFETY LIGHT SYSTEM

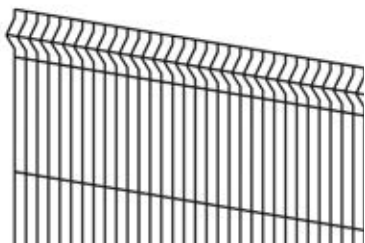The panels, posts and fixations have been tested in accordance with the impact test recommendations of Annex C of the revised ISO 14120:2015 standard. The system withstood an impact of 800 joules. It complies with the regulations and the machinery directive 2006/42/EC. The coating is galvanized & powder coated, available in more than 200 RAL colours, although the standard colours are those indicated.



Fully adaptive panel, it can be cut to size.



PANEL		
Height (mm)	1,355 / 1,855	
Length (mm)	1,500	





With welded base





Safety Light Staple

POST		
Height (mm)	1,530 / 2,030	
Fixation	Pre-drilled post and unmissable screws	

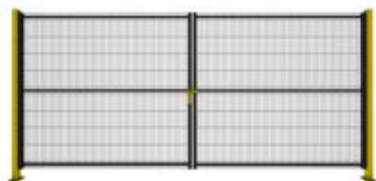


SWING GATE		· Single / Double leaf
Height (mm)	1,500 / 2,000	
Width (mm)	From 1,000 to 4,000	

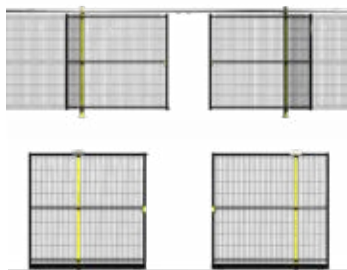


HANGING or SLIDING GATE		· Single / Double leaf
Height (mm)	1,500 / 2,000	
Width (mm)	From 1,000 to 4,000	



TELESCOPIC GATE		· Single / Double leaf
Height (mm)	1,500 / 2,000	
Width (mm)	From 1,635 to 6,010	

## B - MRT HEAVY SAFETY SYSTEM

Mesh panels, posts and fixations have been tested in accordance with the impact test recommendations in Annex C of the revised ISO 14120:2015 standard. The system withstood an impact of 1,600 joules. It complies with the regulations and the machinery directive 2006/42/EC. The coating is galvanized & powder coated, available in more than 200 RAL colours, although the standard colours are those indicated.

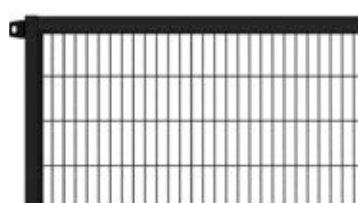

Ø 3,0 mm    100/20 mm

### PANEL

Fillings \*  
Mesh / Galvanized plate / Polycarbonate

Height (mm)	870 / 1,370 / 1,870 / 2,270
Length (mm)	325 / 525 / 825 / 1,025 / 1,225 / 1,525
Frame (mm)	30x30x1.5



\* The standard filling is mesh, two fillings can be combined in the same panel.



With welded base



Safety Heavy Fixation

### POST

Post  
60x60 mm

Height (mm)	1,030 / 1,530 / 2,030 / 2,430
Fixation	Pre-drilled post and retaining washers



### accessories

#### 1- Cutting Kit




#### 2- Adaptable Corner Kit



### SWING GATE

· Single / Double leaf


Height (mm)	1,000 / 1,500 / 2,000 / 2,400
Width (mm)	From 1,000 to 4,000

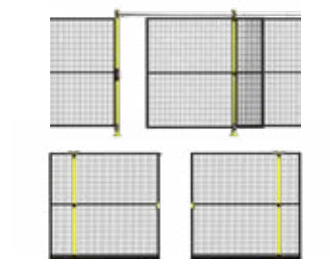

### HANGING OR SLIDING GATE

· Single / Double leaf

Height (mm)	1,000 / 2,000 / 2,400
Width (mm)	From 1,000 to 4,000

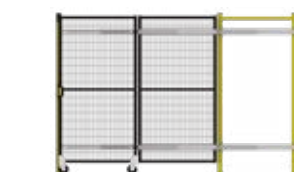

### TELESCOPIC GATE

· Single / Double leaf

Height (mm)	1,000 / 1,500 / 2,000 / 2,400
Width (mm)	From 1,635 to 6,010



## A - SWING GATES

Manufactured according to EN 13241 standard, delivered with CE marking. It supplied preassembled and with its Declaration of Performance.



### Option

- Posts with welded base (except ECO and Residential).
- Single and double leaf gates according to the accessibility requirements for People with Reduced Mobility.

## A1 - RESIDENTIAL RANGE



<b>ECO</b>	· Single leaf	Welded Mesh 200x50 mm	4.0 mm
Height (mm)	1,000 / 1,200 / 1,500		
Width (mm)	1,000		
Post (mm)	ø 48 mm		



### components

1- Adjustable Hinges



2- Closure with Latch



<b>RESIDENTIAL</b>	· Single leaf	Welded mesh 100x50 mm	4.0 mm
Height (mm)	1,000 / 1,200 / 1,500		
Width (mm)	1,000		
Post (mm)	ø 48 mm		



### components

1- Adjustable Hinges



2- Handle and Key Lock



<b>EXOTIC® PANEL</b>	· Single / Double leaf	Panel Exotic®	5.0 mm
Height (mm)	900 / 1,200 / 1,500		
Width (mm)	From 1,000 to 4,000		
Finish	Galvanized & Powder coated		



### components

1- Adjustable Hinges Locinox®



2- Stainless Steel Lock with set of keys



3- Drop Bolt and Ground Stop (double leaf)



OPTION  
Post Base  
(Single leaf width ≤ 1,2m)



## A2 - PROFESSIONAL RANGE



Reversible leaves  
with 90° opening

### CLASSIC MESH

· Single /  
Double leaf

Welded mesh  
50x50 mm

Ø 4.0 mm

Height (mm)

**From 1,000 to 2,000**

Width (mm)

**From 1,000 to 4,000**

Finish

Galvanized & Powder coated / Post-galvanized /  
Bord de mer



#### components

1- Adjustable  
Hinges Locinox®



2- Stainless Steel  
Lock with set of keys



3- Drop Bolt and Ground  
Stop (double leaf)




OPTIONS:  
Defensive  
Profile



Aluminium Gate  
Hold-back Catch



Post Base  
(Single leaf with ≤ 1,2m)

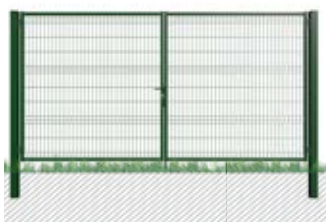

### HÉRCULES®

· Single /  
Double leaf

Hércules® Panel  
200x55 mm

Ø 5.0 mm

Height (mm)

**From 1,000 to 2,400**

Width (mm)

**From 1,000 to 8,000**

Finish

Galvanized & Powder coated / Post-galvanized /  
Bord de mer



#### components

1- Adjustable Hinges  
Locinox® (2 or 3 units  
per leaf)\*



2- Stainless  
Steel Lock with  
set of keys



3- Drop Bolt and  
Ground Stop  
(double leaf)



OPTIONS:  
Defensive  
Profile



Hydraulic  
Gate Closer



Aluminium Gate  
Hold-back Catch



Post Base  
(Single leaf width ≤ 1,2m)



\* It depends on the gate size.



# HÉRCULES® SWING GATE

# GATES



## DIABOLO PLUS

· Single /  
Double leaf

Vertical bars  
Ø 25x1,5 mm

Height (mm) **From 1,000 to 2,500**

Width (mm) **From 800 to 2,400**

Finish Galvanized & Powder coated / Post-galvanized /  
Bord de mer



Suitable for playgrounds, according to EN 1176-1 standard.

### components

1- Self-closing  
Locinox® Hinges



2- Child Safety  
Locinox® Lock



3- Drop Bolt and Ground  
Stop (double leaf)



OPTIONS:  
Triangular  
Cylinder Set



Aluminium Gate  
Hold-back Catch



Post Base  
(Single leaf width ≤ 1,2m)



## RANGE PRO & PLUS

· Single / Double leaf

Height (mm) **From 1,000 to 3,000**

Width (mm) **From 1,000 to 10,000**

Fillings Many options (see page 23)

Finish Galvanized & Powder coated / Post-galvanized\* /  
Bord de mer\*



\* Finish not available for Perforated Plus filling gate.

Reversible leaves with 180° opening / Post and frame sections change by gate size / A 3<sup>rd</sup> hinge per leaf is included depending on the gate size.

### components

1- Adjustable Hinges Locinox®



2- Locinox® Lock



3- Drop Bolt and Ground Stop  
(double leaf)



OPTION:  
Defensive Profile



Hydraulic  
Gate Closer



Triangular  
Cylinder Set



Aluminium Gate  
Hold-back Catch



Post Base  
(Single leaf width ≤ 1,2m)



## filling options

### CLASSIC PRO



□ Not crossing bars  
25x25x1.0 mm

### BEVELED PLUS



□ Crossing bars positioned at 45°  
25x25x1.5 mm

### BALI® PLUS



□ Crossing bars  
25x25x1.0 mm

### EXOTIC® PLUS



○ Crossing bars  
∅ 25x1.5 mm

### NOT CROSSING EXOTIC® PLUS



○ Not crossing bars  
∅ 25x1.5 mm

### PERFORATED PLUS



□ Plate Thickness 1.5 Perforations 30x30 mm

### ONDAS PLUS



○ Crossing bars  
∅ 20x1.5 mm

### RONDO PLUS



○ Not crossing bars  
∅ 25x1.5 mm

### TUBES PLUS



○ Not crossing bars  
∅ 20x1.5 mm

### CROSSING TUBES PLUS



○ Crossing bars  
∅ 20x1.5 mm

### HELIX PLUS



○ Not crossing bars  
∅ 35x1.5 mm

### BUBBLE PLUS



○ Not crossing bars  
∅ 35x1.5 mm

**NEW**

### DOMINO 1/5 PLUS



□ Crossing bars  
10x50 mm

**NEW**

### DUO PLUS



□ Crossing bars  
50x10 & 25x25 mm

ACCORDING TO  
STANDARD EN 13241




## B - SLIDING GATES

Manual opening gates. Manufactured according to EN 13241 with corresponding CE marking.  
Delivered with its Declaration of Performance.

Guide rail to screw or to embed.

Many filling options (page 25).

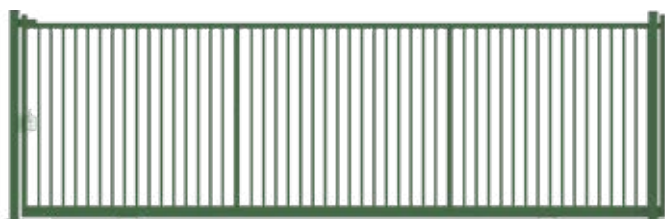

1

### LIGHT

Structure  
Standard

Height (mm)	From 1,200 to 2,500	
Width (mm)	From 3,000 to 8,000	
Fillings	Many options (see pages 25 and 26)	
Finish	Galvanized & Powder coated	

1- Closing Column



2- Locinox® Lock




3- Bottom Girder /  
Guide Rail / Wheels



4- Guide Post or Guide Bridge



5- Stop

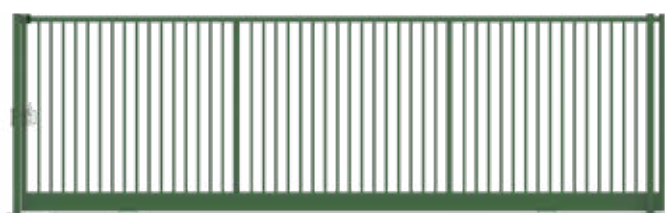

1

### PRO

Structure  
Reinforced

Height (mm)	From 1,200 to 2,500	
Width (mm)	From 3,000 to 12,000	
Fillings	Many options (see pages 25 and 26)	
Finish	Galvanized & Powder coated	

1- Closing Column



2- Locinox® Lock



3- Bottom Girder /  
Guide Rail / Wheels



4- Guide Bridge




5- Stop



## D - CANTILEVER SLIDING GATES



Manual opening gates. Manufactured according to EN 13241 with corresponding CE marking.  
Delivered with its Declaration of Performance.  
It is not necessary to cement the transit area.  
Many filling options (page 25).

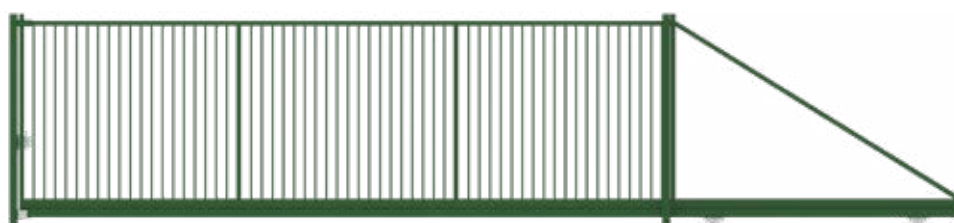

### LIGHT

Structure  
Standard

Height (mm)	From 1,200 to 2,500	
Width (mm)	From 3,000 to 8,000	
Fillings	Many options (see pages 25 and 26)	
Finish	Galvanized & Powder coated	

1- Closing Column




2- Locinox® Lock



3- Bottom Girder / Carriage



4- Guide Post or Guide Bridge

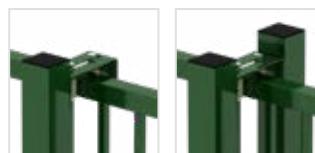

5- Stop



### options

FOR SLIDING AND CANTILEVER GATES:

- 2 possible opening senses, sliding left or right.
- Posts to embed or with welded base.
- Gate without lock and with gang box lid.
- Defensive profile.

### filling options

#### CLASSIC



□ Not crossing bars  
25x25x1.5 mm

#### BEVELED PLUS



□ Crossing bars positioned at 45°  
25x25x1.5 mm

#### RONDO PLUS



○ Not crossing bars  
Ø 25x1.5 mm

# GATES

## FRAMED PLUS



Wire V 5.0 mm  
Wire H 6.0 mm  
Mesh 300x50 mm

## BALI® PLUS



Crossing bars  
25x25x1.0 mm

## EXOTIC® PLUS



Crossing bars  
Ø 25x1.5 mm

## NOT CROSSING EXOTIC® PLUS



Not crossing bars  
Ø 25x1.5 mm

## ONDAS PLUS



Crossing bars  
Ø 20x1.5 mm

## PERFORATED PLUS

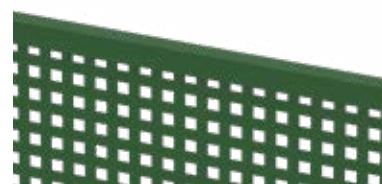


Plate Thickness 1.5 mm  
Perforations 30x30 mm

## TUBES PLUS



Not crossing bars  
Ø 20x1.5 mm

## CROSSING TUBES PLUS



Crossing bars  
Ø 20x1.5 mm

## HÉRCULES®



Wire 5.0 mm  
Hércules® panel 200x55 mm

## TWIN WIRE 6-5-6



Wire V 5.0 mm  
Wire H 6.0 mm  
Twin wire panel 200x55 mm

## TWIN WIRE 8-6-8



Wire V 6.0 mm  
Wire H 8.0 mm  
Twin wire panel 200x55 mm

## HELIX PLUS



Not crossing bars  
Ø 35x1.5 mm

## BUBBLE PLUS



Not crossing bars  
Ø 35x1.5 mm

## NEW DOMINO 1|5 PLUS



Crossing bars  
10x50 mm


## NEW DUO PLUS



Crossing bars  
50x10 & 25x25 mm

## A - HJ MRT® STOCK FENCE

Progressive mesh apertures. The range of HJ MRT® HT and LHT meshes are high tensile strength in horizontal wires.




### HJ MRT® LIGHT [L]

Ø V 1.9 mm

Ø H 2.45 mm top & bottom  
H 1.9 mm infill horizontal

Height (mm)	From 600 to 2,000
Roll length (m)	50 / 100
No. line wires	From 6 to 20
Distance between verticals (cm)	15 / 30
Finish	Class A galvanized / Class A galvanized + ECOVER® Class A galvanized + 2H ECOVER® / ZnAl®




### HJ MRT® MEDIUM [C]

Ø V 2.45 mm

Ø H 3.0 mm top & bottom  
H 2.45 mm infill horizontal

Height (mm)	From 800 to 2,000
Roll length (m)	50
No. line wires	From 8 to 17
Distance between verticals (cm)	15
Finish	Class A galvanized / Class A galvanized + ECOVER® Class A galvanized + 2H ECOVER® / ZnAl®



### HJ MRT® HEAVY [B]

Ø V 3.0 mm

Ø H 4.0 mm top & bottom  
H 3.0 mm infill horizontal

Height (mm)	From 800 to 1,640
Roll length (m)	50
No. line wires	From 8 to 12
Distance between verticals (cm)	15
Finish	Class A galvanized / Class A galvanized + ECOVER® Class A galvanized + 2H ECOVER® / ZnAl®




### HJ MRT® LIGHT HIGH TENSILE [LHT]

Ø V 1.9 mm

Ø H 2.45 mm top & bottom  
H 1.9 mm infill horizontal

Height (mm)	From 1,600 to 2,000
Roll length (m)	50
No. line wires	From 23 to 25
Distance between verticals (cm)	15
Finish	Class A galvanized / Class A galvanized + ECOVER® Class A galvanized + 2H ECOVER® / ZnAl®

# STOCK FENCING




## HJ MRT® HIGH TENSILE [HT]

∅ V 2.45 mm ∅ H 2.45 mm

Height (mm)	From 530 to 1,900
Roll length (m)	100
No. line wires	From 5 to 15
Distance between verticals (cm)	15 / 22 / 30
Finish	Class A galvanized / Class A galvanized + ECOVER® Class A galvanized + 2H ECOVER® / ZnAl®

## B - AGROTOR® PREMIUM

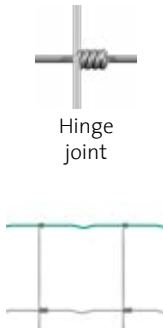

## AGROTOR® PREMIUM

∅ V 1.9 mm ∅ H 2.45 mm top & bottom  
H 1.9 mm infill horizontal

Height (mm)	From 1,000 to 1,480
Roll length (m)	50 / 100
No. line wires	From 8 to 18
Distance between verticals (cm)	15
Finish	Class A galvanized + 2H ECOVER® on the top & bottom

## C - XK MRT® STOCK FENCE

Progressive and non-progressive mesh apertures. Options of wire tensile strength are: high tensile, hard or soft. Wire diameters change depending on the range.



## XK MRT®

∅ Verticals wires from 2.0 to 2.5 mm ∅ Horizontal wires from 2.0 to 3.43 mm

Height (mm)	From 600 to 2,600
Roll length (m)	50 / 100 / 250 / 300
No. line wires	From 8 to 26
Distance between verticals (cm)	5 / 7.5 / 10 / 15 / 22 / 30
Finish	Class A galvanized / Class A galvanized + ECOVER® / ZnAl®

### range options

#### XK MRT® LIGHT



∅ All wires 2.0 mm

#### XK MRT®



∅ All wires 2.5 mm

#### XK MRT® HEAVY





∅ Vertical and knot wires 2.5 mm  
∅ Horizontal wires 3.43 mm top & bottom 2.5 mm infill horizontal

## D - FK MRT® STOCK FENCE

Progressive and non-progressive mesh apertures. Wire tensile strength is: high tensile or hard. Wire diameters change depending on the range.





FK MRT®		 Verticals From 2.0 to 2.5 mm	 Horizontals From 2.0 to 3.5 mm
Height (mm)	From 800 to 3,050		
Roll length (m)	50 / 100		
No. line wires	From 8 to 26		
Distance between verticals (cm)	15 / 30		
Finish	Class A galvanized / Class A galvanized + ECOVER® / Class A galvanized + 2H ECOVER® / ZnAl®		

### range options



#### FK MRT® LIGHT



-  Vertical wires  
2.0 mm
-  Horizontal wires  
2.5 mm top & bottom  
2.0 mm infill horizontal



#### FK MRT® MEDIUM LIGHT



-  Vertical wires  
2.0 mm
-  Horizontal wires  
3.0 mm top & bottom  
2.0 mm infill horizontal



#### FK MRT®



-  Vertical wires  
2.5 mm
-  Horizontal wires  
2.5 mm top & bottom  
2.5 mm infill horizontal



#### FK MRT® MEDIUM



-  Vertical wires  
2.5 mm
-  Horizontal wires  
3.0 mm top & bottom  
2.5 mm infill horizontal

#### FK MRT® HEAVY



-  Vertical wires  
2.5 mm
-  Horizontal wires  
3.5 mm top & bottom  
2.5 mm infill horizontal



# FK MRT®

# WELDED, ELECTRO-WELDED MESH & WIRE NETTING

## PROGRESSIVE WELDED MESH



### PROGRESSIVE WELDED MESH



Verticals  
from 2.2 to 3.0 mm



H 2.2 to 3.4 mm top & bottom  
H 2.2 to 3.0 mm infill horizontal

Height (mm)	From 1,200 to 2,500
Roll length (m)	25* / 50
No. line wires	From 12 to 25
Distance between verticals (cm)	5* / 15
Finish	Class B ZnAl® / Heavy galvanized / Class A ZnAl®

\* Only available for 120/17/5 and 180/23/5 geometries.

## ELECTRO-WELDED MESH



### WELDED MESH ROLLS



From 0.8 to 3.0 mm

Height (mm)	From 508 to 2,032
Roll length (m)	5 / 25 / 30*
Mesh (mm)	6x6 / 8x8 / 10x10 / 13x13 / 16x16 / 19x19 / 25x13 / 25x25 / 51x25 / 51x51 / 102x51
Finish	Class D galvanized / Galvanized & PVC coated / Post-galvanized

\* 30 m roll length is packaging format for galvanized mesh.



### BADGER FENCE



2.0 mm

Height (mm)	300 / 1,000 / 1,200 / 1,500
Roll length (m)	25
Mesh (mm)	25.4 x 50.8
Finish	Class A ZnAl®

## WIRE NETTING MESH




### WIRE NETTING MESH

Height (mm)	From 500 to 2,000
Roll length (m)	10 / 50
Mesh (mm)	13 / 16 / 19 / 25 / 31 / 41 / 51
Finish	Class D galvanized / Galvanized & PVC coated*

\* Check conditions.

## A - BARBED WIRE



### ERIZO® & DARDO®

Ø From 1.6 to 1.8 mm

Roll length (m)

100 / 250 / 500

Distance between barbs (mm)

80 / 100 / 127 / 150

Finish

Erizo®: Class A galvanized / Class A galvanized + ECOVER® / ZnAl®  
Dardo®: Class D galvanized



### IOWA & BRAVO®

Ø From 2.0 to 2.7 mm

Roll length (m)

100 / 200 / 250

Distance between barbs (mm)

80 / 100 / 150

Finish

Iowa: Class D galvanized / Class A galvanized  
Bravo®: Class D galvanized / Class A galvanized / Class A galvanized + ECOVER® / Green PVC coated

## B - BARBLESS WIRE



### BARBLESS WIRE MRT

Ø 2.4 mm

Roll length (m)

200

No. twist / meter

19 ± 3

Finish

Class A galvanized



# BARBED WIRE

# WIRE, NAILS & STAPLES

## WIRE

MRT is wire drawer with over 150 years of experience and offer a wide range of wires adapted to the transformer needs (paper industry, manufacture of hangers, handles, etc.), to agriculture (vine wire, etc.) and to hardware store needs.



### WIRE - INDUSTRY & TRANSFORMATION

From 0.9 to 8.26 mm

Estate

Soft or Hard

Orbit / Coil (kg)

350 - 1,000 \* / 1,300 - 1,400

Finish

Class D galvanized / Class A galvanized / Class A galvanized + ECOVER® / Galvanized & PVC coated by extrusion / ZnAl®

\* PVC Coated wire only 500 or 700 kg orbits



### WIRE - AGRICULTURE & HARDWARE STORES

From 0.9 to 5.9 mm

Estate

Soft or Hard

Roll (kg)

5 / 25 / 35 / 40 / 50 \*

Finish

Class D galvanized / Class A galvanized / Class A galvanized + ECOVER® / Galvanized & PVC coated by extrusion / ZnAl®

\* PVC Coated wire only 5 or 25 kg rolls

## RECOVERING OPTIONS



ECOVER® is designed to protect galvanized wire; adding an excellent resistance against corrosion, increasing the wire life; even in extreme weather conditions. Ideal for ranching and agriculture.



95% Zinc + 5% Aluminium. The most durable galvanized steel wire. The increased homogeneous properties of the ZnAl® coating gives it greater adhesion than zinc only galvanization, making it more resistant to rust.

## NAILS & FENCING STAPLES

6 cartons of 3 kg



### NAILS

Flat head

From 14 to 25 in Paris number

Length (mm)

From 40 to 200

Finish

Polish

Smooth

6 cartons of 3 kg

Barbed

Buckets of 5, 10 and 20 kg

### FENCING STAPLES

From 16 to 19 in Paris number

Type

Smooth / Barbed

Length (mm)

From 20 to 40

Finish

Class D galvanized / Class A galvanized / Class A galvanized + ECOVER® / ZnAl®

## MOSQUITO NETTING

Mosquito netting, it's a woven commercially galvanized wire.



### MOSQUITO NETTING

Height (mm)	600 / 800 / 1,000 / 1.200
Roll Length (m)	30
Mesh (mm)	18x15
Finish	Class D galvanized

## WELDED MESH PANEL

Welded mesh panel is used in the fabrication of cages and machine safety units.




### WELDED MESH PANEL

Ø 2.7 / 3.0 / 4.0 / 5.0 / 6.0 mm

Dimensions (mm)	Upon request
Mesh (mm)	25x25 / 30x30 / 40x40 / 50x50 / 100x50 / 150x50 / 200x50 / 250x50 / 300x50
Finish	Grey / Class D galvanized / Post-galvanized / Powder coated

## MOBILE FENCING

Mobile fencing is used to temporarily protect access to projects under construction or fairs.

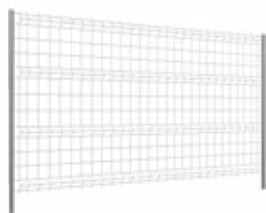

We can provide the panel without posts.

### MOBILE FENCING

Ø 3.25 mm

Post  
40x1.0 mm

Dimensions (mm)	3,500x1,900
Central mesh (mm)	133x125
Finish	Class D galvanized

#### Accessories

1- Reinforced concrete base: 57.5x24x10.5 cm



2- Anti-vandalism clamp



## CLOTHESLINE



### CLOTHESLINE

Post  
34x1.5 mm

Dimensions (mm)	500x2,450
No. of threads	4
Finish	PVC Coated



# GENERAL SALE TERMS AND CONDITIONS

## 1. General Conditions

1.1 All sales and/or supplies by MOREDA RIVIERE TREFLERÍAS, hereinafter “the Vendor” or “MRT”, shall be governed by these General Conditions of Sale, except those which, differing from these Conditions, are expressly accepted by MRT in writing. MRT does not sell to final consumers, therefore, (i) all sales subject to these General Conditions are trade sales and (ii) consumer protection legislation does not apply to the sales regulated here.

The parties shall not be bound by any other conditions or agreements that have not been accepted in writing or expressly by MRT nor shall any such conditions or agreements have any effect.

## 2. Formal confirmation of orders and scope of supply:

2.1 When the Client places an order, MRT may accept it or not. If MRT accepts the order, it shall inform the Client. Only those orders that have been accepted shall be binding for MRT, and under the terms and conditions under which they have been accepted.

2.2 The sale shall include the supplies detailed in the order accepted by MRT.

2.3 The weights, dimensions, capacities, technical specifications, photos and configurations referring to the Vendor's products included in catalogues, pamphlets, website, prospectus, technical literature or any other format, are intended as guidance information and shall have no binding or contractual status, with the exception of cases where the Vendor expressly accepts a specification agreed with the Client in writing.

2.4 The Vendor must always be notified in writing of any modifications and/or variations of the scope of an order and these shall only be valid if expressly accepted by the Vendor in writing.

## 3. Prices:

3.1 The prices that appear in offers issued by MRT do not include VAT nor any other taxes, duties or charges. Taxes and other duties shall be included in the invoice with the corresponding rates.

3.2 The prices that appear in the offers issued by MRT only apply to the material sums and qualities specified in same and always under the terms and conditions specified therein.

3.3 The prices indicated in any future offers issued by MRT are built, among other elements on the basis of payment conditions specified in same. Consequently, any extension of the term of payment agreed by the parties shall include the corresponding review of the prices for the purpose of adjusting them accordingly to the new conditions agreed.

3.4 The prices that appear in any offers issued by MRT do not include shipping.

3.5 The prices and other conditions contained in the offers or in the Order Confirmation issued by MRT are not final for MRT and may be altered as a result of the effects of the Russia-Ukraine war and/or any event of force majeure or that alters contractual balance. If, in the reasonable opinion of MRT, any circumstance occurs that will impact the balance of the obligations of the parties, MRT may suspend the supply and the parties must negotiate and agree on the necessary changes to correct such situation.

## 4. Payment Conditions:

4.1 The Vendor's offer shall include the payment conditions of the supply.

4.2 The payment shall be made by bank transfer or using any other method admitted in the manner on which the parties may agree. The payment will be made without any deduction except those provided for on a compulsory basis by law or which have been agreed expressly by the parties in writing. The final costs incurred in the payment method shall be assumed in full by the Purchaser.

4.3 Except where a delivery date is expressly indicated as an essential term, the term of delivery shall not be considered essential.

Any delay in the delivery of the supply for reasons beyond the scope of responsibility of the Vendor shall not entitle it to change the maturities or payment conditions agreed with the Purchaser. Nor shall it result in any right to any claim against MRT.

Delay of delivery for reasons attributable to the Vendor may give rise to compensation but shall not entitle the purchaser to terminate the sale.

4.4 If the purchaser does not meet the deadlines or payment conditions agreed, they must pay the Vendor, with no need for prior notification of same, interest on arrears in accordance with the applicable legislation establishing measures to combat late payments in commercial transactions.

4.5 In the event that the Purchaser fails to comply with its payment obligations in the terms agreed, the Vendor, in addition to being entitled to use any remedy as per the applicable legislation, without limitation, may suspend or terminate the supply contract and/or the execution of the services associated with same, all without prejudice to the rights of MRT to claim the corresponding compensation for damages suffered as a result of said non-compliance. Without prejudice to the above, where late payment for the supplies is agreed, the non-payment of any fee shall entitle MRT to declare the early termination of the credit and claim the full sum from the Client. The use of one or more of the remedies for non-compliance provided for in these General Conditions or in Law shall not constitute the waiving of any of the others.

4.6 The submission of a claim on the part of the Purchaser shall not entitle same to freeze payments or to make any reductions of any kind with respect to same.

4.7 If MRT has grounds to believe that the Client cannot meet its obligations arising from the Contract or any other contract entered into with the Group of companies to which MRT belongs, named Celsa (which is made up of all those companies that are directly or indirectly controlled by MRT, that directly or indirectly control MRT, that are under joint management with MRT or that are under direct or indirect common control, with MRT, or, in short, all those companies that have some participation, direct or indirect, of whatever type, in MRT), it may, at any time, suspend fulfilment of same, unless the Client immediately pays the total sum of the price and satisfies all pending payments arising from other contracts with the Celsa in full, or delivers to MRT a joint bank guarantee at first requirement for such sum. MRT shall issue immediate notification of the suspension, granting the Client a reasonable term to make the payment or deliver the guarantee, upon expiry of which the Vendor may terminate the contract. All of the above is without prejudice to the other rights granted to MRT in such circumstances by Law and by these General Conditions.

4.8.- If the sale to the Client is covered by credit insurance, and during or pending the supply, the insurance company informs the Vendor of the removal of the coverage in relation to this client, MRT may suspend deliveries except where the Client immediately pays the total price or delivers to MRT a joint bank guarantee for said sum upon initial request thereof. MRT shall issue immediate notification of the suspension, granting the Client a reasonable term to make the payment or deliver the guarantee, upon expiry of which the Vendor may terminate the contract. All of the above is without prejudice to the other rights granted to MRT in such circumstances by Law and by these General Conditions.

## 5. Term and Conditions of Delivery:

5.1 The delivery shall be completed in the place and under the conditions agreed between the parties. In the absence of express agreement, it shall be understood that it will take place ExWorks at one of the two plants of MRT depending on the product requested (MRT GIJÓN: Av. Del Príncipe de Asturias, s/n – 33211 Gijón or MRT Cerdanyola: C/Montclar,61 – Polígono Polizur – 08290 CERDANYOLA DEL VALLES).

MRT shall not be obliged to deliver the goods if the Purchaser is not fully up to date with all payment obligations.

The terms of delivery shall be the following, without prejudice to the provisions of Clause 5.2 below:

- Where a fixed delivery date is set, the order shall be delivered on said date.

- In the event that, rather than establishing a specific delivery date, a period of time is established for same (e.g. three weeks), said term shall start from the acceptance of the order on the part of MRT (or from MRT's receipt of the technical specifications where this occurs later).

If no delivery date is agreed, MRT shall deliver the goods in accordance with the production schedule it deems appropriate. In such cases, MRT shall also be entitled to make partial deliveries.

The purchaser's refusal to receive or remove the goods shall entitle MRT to invoice the purchaser, who accepts same, a sum of one tenth of the value of the goods per day until the goods are effectively removed and to claim any other damages MRT suffers, without prejudice to the right to terminate the contract and others permitted in the General Conditions and applicable legislation.

5.2 The Vendor is not obliged to comply with the term of delivery where provided for by Law, or these General Conditions, where any of the following situations arise:

a) The Purchaser fails to deliver the documentation required for the execution of the order on time.

b) The Purchaser fails to comply with (i) any of the contractual obligations provided for in MRT's offer or (ii) in the order issued by the Client and accepted by MRT or (iii) in these General Conditions.

c) For reasons not attributable to the Vendor delays arise in the production or availability of all or some of the elements of the supply. For information purposes, these include, but are not limited to the following causes of delay: strikes of suppliers, transport and services, failures in third party supplies, failures in transport systems,

flooding, storms, disturbances, strikes, stoppages on the part of the personnel of the Vendor or subcontractors, sabotage, accidental stoppages in workshops of the facilities of the Vendor due to breakdown.

In cases a), b) and c) above, the new terms of delivery shall not modify the programming of payments for the order.

## **6. Packaging and Transport:**

6.1 Except where previously agreed with the Client, the packaging and materials subject to supply are not included in the price.

6.2 The transport, including loading and unloading shall be made in accordance with the conditions specified in the offer issued by MRT or the Client's order accepted by MRT.

## **7. Inspection and Reception:**

7.1 Once the supply is received, the Purchaser shall verify the content of same.

- Any defect in the quality and/or quantity and/or weight attributable to the Vendor and which is visible or apparent should be declared by the Purchaser in writing upon delivery. The appearance of defects shall be noted by the Purchaser on the delivery note or CMR or in the transport delivery document.

- Any deficit other than those listed above must be reported by the Purchaser to MRT within a period of no more than 7 days from receipt of the goods.

7.2 If the supply contains defects and/or faults attributable to the Vendor and these are communicated within the term and in the manner provided for in the previous clause, MRT shall take the measures provided for in these General Conditions for their elimination.

Once the aforementioned terms have expired without the Vendor having received written communication from the Purchaser on the eventual defects or faults, it shall be understood that the order has been accepted for all corresponding legal effects, with no subsequent claims admitted.

7.3 Except where agreed otherwise, the parties expressly accept that there may be variations of in and around +/- 10% in the weight of the goods invoiced, among other reasons due to the existence of differences in the set-up of scales.

In the event that the difference of weight is in excess of 10%, the Purchaser shall inform the Vendor of such circumstance in writing within the term provided for in Clause 7.1 (first script) above, attaching the corresponding scales tickets and the calibration certificate of the scales with the differences to said communication. Said differences, once verified shall be delivered to the purchaser.

## **8. Claims:**

8.1 Any claim in relation to the supply must, in addition to being lodged within the term provided in Clause 7 above, be accompanied by tests or samples of the material rejected (physical samples of defective material, breakages, tests carried out by the purchaser, etc.) and a brief report on the grounds or reasons for such rejection.

Once the samples are analysed by the Vendor, it shall be entitled to verify all of the material affected by the rejection.

8.2 Except where agreed otherwise, the returns or consignments of material to the Vendor's facilities for payment, replacement or repair, must always be made with freight paid.

8.3 Under no circumstances shall returns or complaints relating to material that has been used or assembled on other equipment or facilities be accepted.

## **9. Guarantees:**

9.1 In the event that the goods present any defect or fault attributable to the Vendor and these have been communicated in the manner and the terms described in these General Conditions, the Purchaser shall be entitled to have the Vendor carry out some of the following actions, at the choice of the Vendor:

- The return to the Purchaser of the sum paid for same to the Vendor for the defective goods.

- The replacement of the defective goods with other non-defective goods, or

- The Vendor shall carry out, at its own cost, the conditioning of the material necessary.

Except where agreed otherwise in writing, under no circumstances shall the Vendor assume the costs of conditioning or rework of the material by personnel external to MRT.

9.3 Damages cause by inadequate handling, storage or keeping of the goods and general damages not attributable to the Vendor shall be excluded from this guarantee. All complaints shall be rejected if, after confirmation of the defects, or upon confirmation of same, the Client continues with the processing of the products.

9.4 MRT does not guarantee that its products are suitable for the specific use the Client makes of same, nor that they are appropriate for use, transformation and/or coating operations the Client intends to perform on them. The Client shall be responsible for the damages arising from the use and/or processing and/or finishing and/or coating of the products and commits to hold MRT harmless in relation to any third party complaint regarding same. MRT guarantees only the delivery of the manufactured product in accordance with the product standards applied as standard in the sector.

9.5 Except where the applicable legislation imposes additional guarantees on a compulsory basis, this guarantee shall constitute the only guarantee applicable to the products or material sold by MRT.

## **10. Limitation of Responsibility:**

10.1 Under no circumstances shall the Vendor be responsible for the indirect damage or consequences that may arise as a consequence of the supply and the use, including but not limited to: loss of production, loss of profit, capital costs, stoppage costs, personal injury, impairments or damage to equipment, systems and buildings of the Purchaser or third parties and others, as such damages are produced at their facilities and their client's facilities or the clients of same. The Client shall hold MRT harmless in relation to any third party claim for this sum.

10.2 In any case, in the absence of compulsory provision otherwise established in the applicable legislation, the total liability of the Vendor arising from the supply shall be limited to the maximum value of the supply to which said claim pertains. The Client shall hold MRT harmless in relation to any third party claim in violation of the above.

## **11. Reservation of Title:**

11.1 The goods subject to the sale shall remain the property of MRT until their full payment on the part of the Purchaser.

To these effects, the Purchaser commits to keeping the goods sold duly marked as property of MRT until the payment date. Similarly, the Purchaser commits to communicating and warning any third party of the fact that MRT is the owner of the goods until full payment is completed.

## **12. Industrial and Intellectual Property Confidential Information:**

The relation tabled between the Vendor and the Purchaser does not imply the transfer or licensing of any type of relation to the intellectual and industrial property rights held by MRT. Any intellectual or industrial property right that might arise as a consequence of the supply regulated by these General Conditions shall belong wholly to MRT which may register and use same as it sees fit.

The Client shall treat all plans, drawings, procedures, instruction documents and other information provided by MRT to the Client (except to the extent such information is public knowledge) and may not disclose same in part or in full to third parties without the prior written consent of MRT. Nor shall the Client use same for any purposes other than the operation provided for herein.

## **13.- Goods Produced to Client's Specifications:**


MRT shall not assume any responsibility in relation to the accuracy or validity of the information, specifications, instruction or plans ("Information") supplied by the Client. The Client shall compensate and hold MRT, its workers, directors, administrators and representatives, harmless for any damages or liability arising from the use of said information.

## **14. Jurisdiction and Applicable Legislation:**

The parties expressly waive any other rights that may correspond to them and submit to the jurisdiction and competency of the Courts and Tribunals of Barcelona (Spain).

This agreement is governed by Spanish law.

# CONTACT US

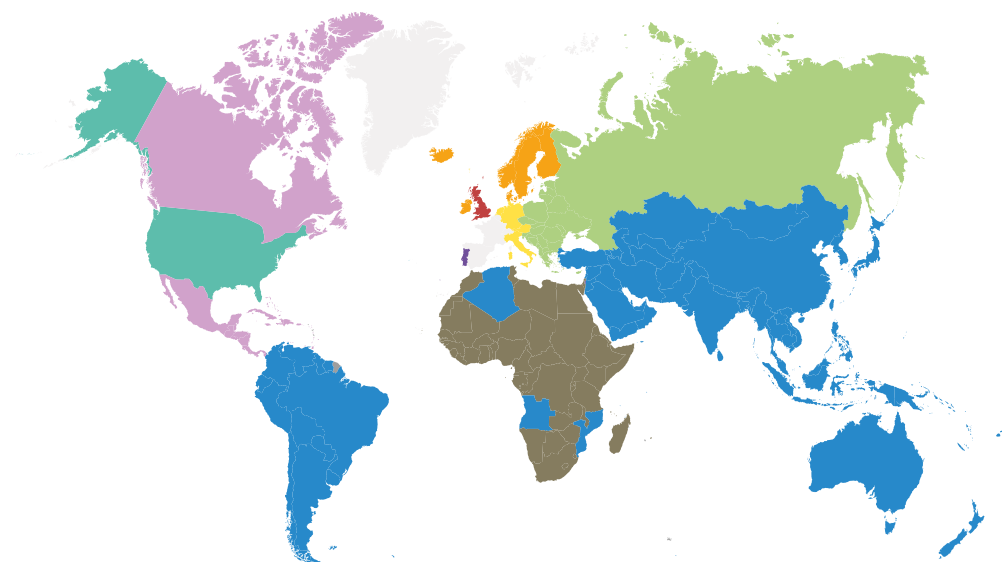**Diego Didierlaurent**

diego.didierlaurent@moreda.com  
+34 680 249 597

**Eugeni Vilar**

eugeni.vilar@moreda.com  
+34 668 135 893

**Jan Marcet**

jan.marcet@moreda.com  
+34 668 139 277

**Gregorio Barguilla**

gbarguilla@moreda.com  
+34 607 634 439

**Mohamed Aibibaouen**

mohamed.aibibaouen@moreda.com  
+212 662 892 032

**Bruno Pina**

bruno.pina@moreda.com  
+34 679 156 349

**Sergio Salvago**

sergio.salvago@moreda.com  
+34 682 579 856

**MRT Fencing**

mrtfencing@moreda.com  
+44 1623 703 991

**Sam Mirab**

sam@moreda.com  
+34 608 169 793

 **FACTORIES****BARCELONA**

C/ Montclar, 61,  
Polígono Polizur  
08290 Cerdanyola del Vallès  
Barcelona - SPAIN

**GIJÓN**

Av. del Príncipe de Asturias, s/n  
33211 Gijón  
Asturias - SPAIN

*Can we help you?*

☎ +34 935 944 400  
✉ [salestm@moreda.com](mailto:salestm@moreda.com)

*News wire*  
The MRT newsletter



**moreda.com**

**CELsa** | **MRT**  
MOREDA RIVIERE  
TREPLERAS