

HJ MRT® STOCK FENCE

Heavy [B]




WARRANTY
10
YEARS



PROPERTIES

- Progressive stock fencing.
- The largest wires of the range for more security.
- Class A Heavy galvanized wire according to EN 10244-2 standards.
- Made according to EN 10223-5 standards.
- Horizontal wires come with crimps between each knot to add tension to the wire and assist with water run off.

Hinge joint

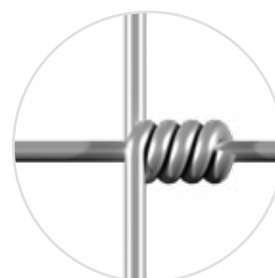


Height (mm)	Top and bottom wires		Infill horizontal wires		Vertical wires	
	Diameter (mm)	Tensile strength (kg/mm ²)	Diameter (mm)	Tensile strength (kg/mm ²)	Diameter (mm)	Tensile strength (kg/mm ²)
From 800 to 1,640	4.00	≥ 71	3.00	≥ 71	3.00	45 - 55

OTHER COATING OPTIONS

- Heavy galvanized + 2H ECOVER®
- Heavy galvanized + ECOVER®
- ZnAl®
- Other standards available (ASTM, SAE, BS, AS/NZS...)



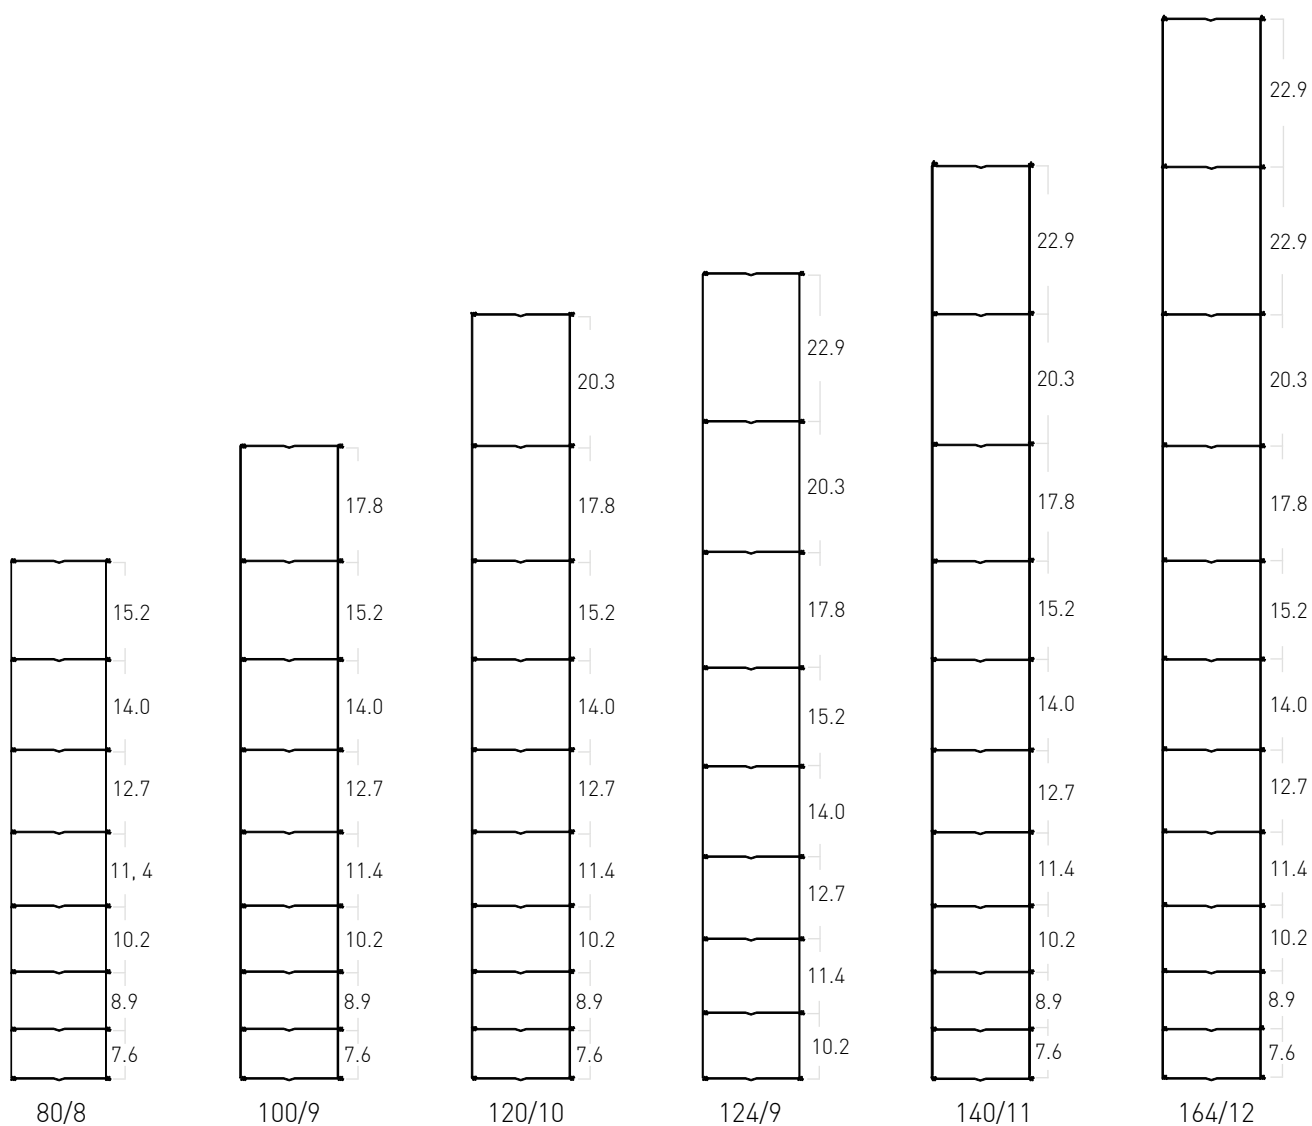

Type	Height (cm)	No. of horizontal wires	Distance between vertical wires (cm)	Roll length (m)
80/8	80	8	15	50
100/9	100	9		
120/10	120	10		
124/9	124	9		
140/11	140	11		
164/12	164	12		

Other dimensions available upon request.