


SWING GATE

ONDAS PLUS

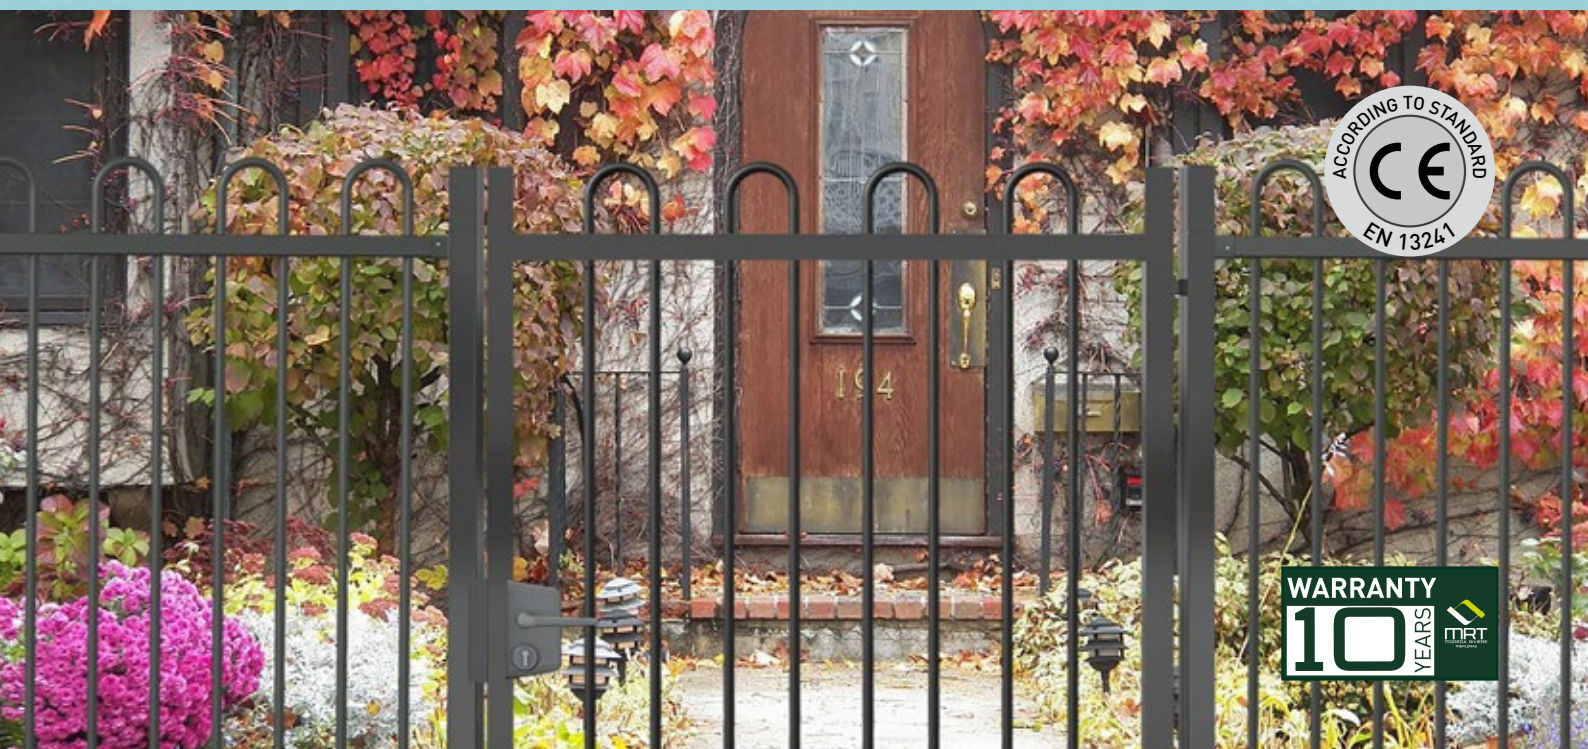

CHARACTERISTICS


- Manual access.
- Variable post section according to the gate size.
- Gate supplied preassembled and easy access to its Declaration of Performance.
- Posts to dig in, welded base plated option.
- According to many national accessibility regulations for People with Reduced Mobility, request us for more information.

Filling

Vertical bars: Ø 20 x 1.5 mm.

Free space between bent bars: 100 mm.

Distance between bars: maximum 100 mm.

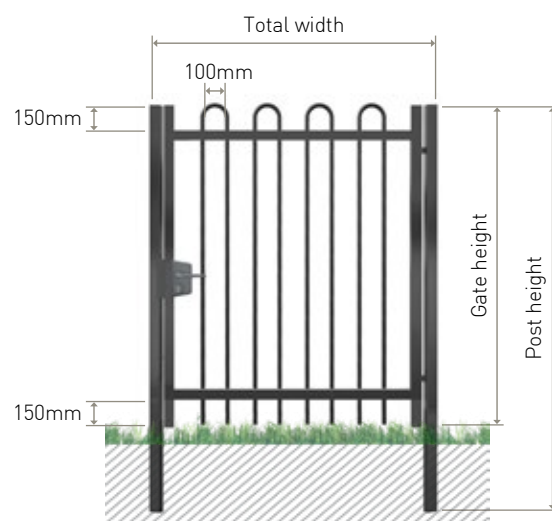

COMPONENTS

LOCINOX® LOCK

- European cylinder: 54 mm [symmetric 27-27] keyed to differ.
- Stainless mechanism.
- Adjustable from 40 to 60 mm.
- Easily reversible latch without disassembly.



LOCINOX® HINGE

Our fall-proof system for long leaves: with an additional third hinge.

- Hot dip galvanized.
- 180° opening.
- Fully reversible.
- The eye-bolt also changes to adapt to the posts size.



GROUND STOP AND DROP BOLT: (double leaf gates only).



STANDARD DIMENSIONS

SINGLE LEAF GATE

POST SIZE / HEIGHT (mm)		Nominal gate width (m)												
		1.0		1.2		1.5		2.0		3.0		4.0		5.0
Gate height (m)	1.0	60x60 / 1,430						80x80 / 1,480*		-		-		
	1.2	60x60 / 1,630				80x80 / 1,680				100x100 / 1,730*		-		
	1.5	60x60 / 1,930				80x80 / 1,980		100x100 / 2,030		120x120 / 2,080*		-		
	1.7	60x60 / 2,130			80x80 / 2,180		100x100 / 2,230		120x120 / 2,280		120x120 / 2,330*		140x140 / 2,380*	
	2.0	80x80 / 2,480					100x100 / 2,530		120x120 / 2,580		140x140 / 2,680		140x140 / 2,680*	
	2.5	80x80 / 2,980		100x100 / 3,030			120x120 / 3,080		140x140 / 3,180		150x150 / 3,230		160x160 / 3,280*	
	3.0	100x100 / 3,530			120x120 / 3,580		120x120 / 3,630		140x140 / 3,680		160x160 / 3,780		200x200 / 3,880*	

FRAME SIZE (mm)	50x50	60x60	60x60 vertical - 60x80 horizontal
-----------------	-------	-------	-----------------------------------

* Gates with posts of this size have 3 hinges for added security.

DOUBLE LEAF GATE

POST SIZE / HEIGHT (mm)		Nominal gate width (m)						
		2.0	3.0	4.0	5.0	6.0	8.0	10,0
Gate height (m)	1.0	60x60 / 1,430	80x80 / 1,480	60x60 / 1,430		80x80 / 1,480*	-	-
	1.2	60x60 / 1,630	80x80 / 1,680	100x100 / 1,730	80x80 / 1,680		100x100 / 1,730*	-
	1.5	60x60 / 1,930	80x80 / 1,980	100x100 / 2,030			120x120 / 2,080*	-
	1.7	60x60 / 2,130	80x80 / 2,180	100x100 / 2,230		120x120 / 2,280	120x120 / 2,330*	140x140 / 2,380*
	2.0	80x80 / 2,480		100x100 / 2,530	120x120 / 2,580		140x140 / 2,680	140x140 / 2,680*
	2.5	80x80 / 2,980	100x100 / 3,030	120x120 / 3,080	120x120 / 3,130	140x140 / 3,180	150x150 / 3,230	160x160 / 3,280*
	3.0	100x100 / 3,530	120x120 / 3,580	120x120 / 3,630	140x140 / 3,680		160x160 / 3,780	200x200 / 3,880*

FRAME SIZE (mm)	50x50	60x60	60x60 vertical - 60x80 horizontal
-----------------	-------	-------	-----------------------------------

* Gates with posts of this size have 3 hinges for added security.



How to calculate the TOTAL GATE WIDTH? *

Single leaf nominal gate width (mm) + (2 x post size (mm)) + 100 mm

Double leaf nominal gate width (mm) + (2 x post size (mm)) + 160 mm



How to calculate the PASSAGE? *

Single leaf nominal gate width (mm) + 46,7 mm

Double leaf nominal gate width (mm) + 160 mm

* For 5.0 m **single leaf** gate width and 3.0 m height, subtract 15 mm from the total.
For 10.0 m **double leaf** gate width and 3.0 m height, subtract 25 mm from the total.

ASSOCIATED PRODUCTS

HYDRAULIC GATE CLOSER



GATE HOLD-BACK CATCH



TRIANGULAR CYLINDER SET



BASE PLATE:

Suitable for single leaf gates with a 1.2 m maximum width.



FINISHING FEATURES

- Steel galvanized sheet according to EN 10346 standards.
- Polyester powder coating, microcrystalline phosphating by a process of electrostatic application. Polyester thickness: 80 microns minimum.

